MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH


ALCYO ACCU-TRK SERIES - Non reversible

WATT: 110 / CONSUMPTION: 340 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 5 mm (*) Optional on ATE version: direct starting for Right and reversible motors.

Data sheet

ALCYO22 ATE (*)

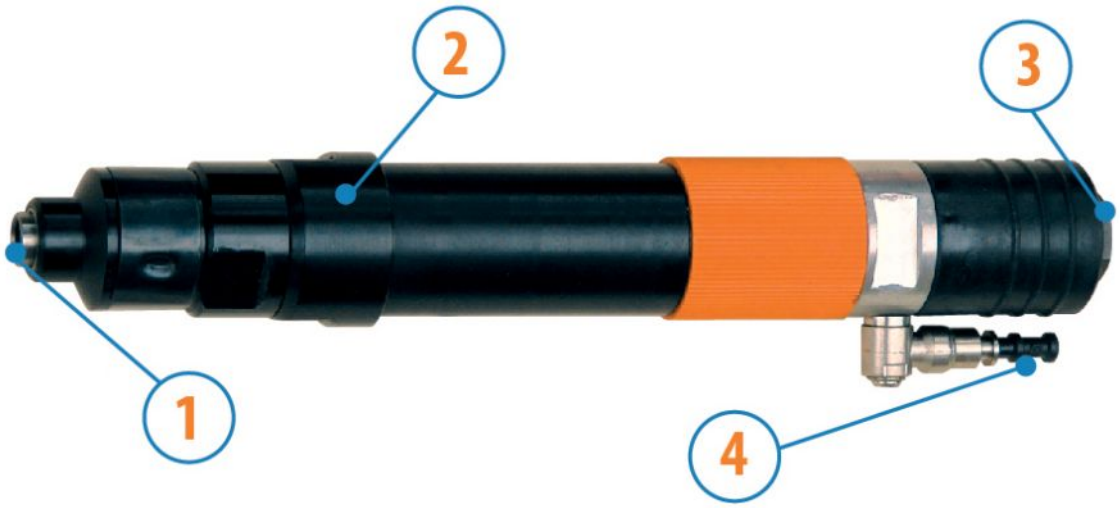

1. 1/4" hexagonal bit holder
2. Grip zone
3. Compressed air inlet
4. Screwing completed signal

Technical specification

Right rotation - Model	ALCYO22 ATE (*)
Right rotation - Code	8604273
No-load speed - rpm/min	1200
Torque Nm - Nm	0,8 - 2
Clutch spring	Blue

Form features

Standard coupling bit holder 1⁄4“ (6.35 mm)

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
ALCYO22 ATE (*)

ALCYO ACCU-TRK SERIES - Non reversible

WATT: 110 / CONSUMPTION: 340 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 5 mm (*) Optional on ATE version: direct starting for Right and reversible motors.

Torque Adjustment

