
# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

ALFB ACCU-TRK SERIES - Non reversible

Data sheet
**ALFB22 AT**

WATT: 190 / CONSUMPTION: 480 Nl/1'
Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm (*) Optional on ATE version: direct starting for Right and reversible motors.

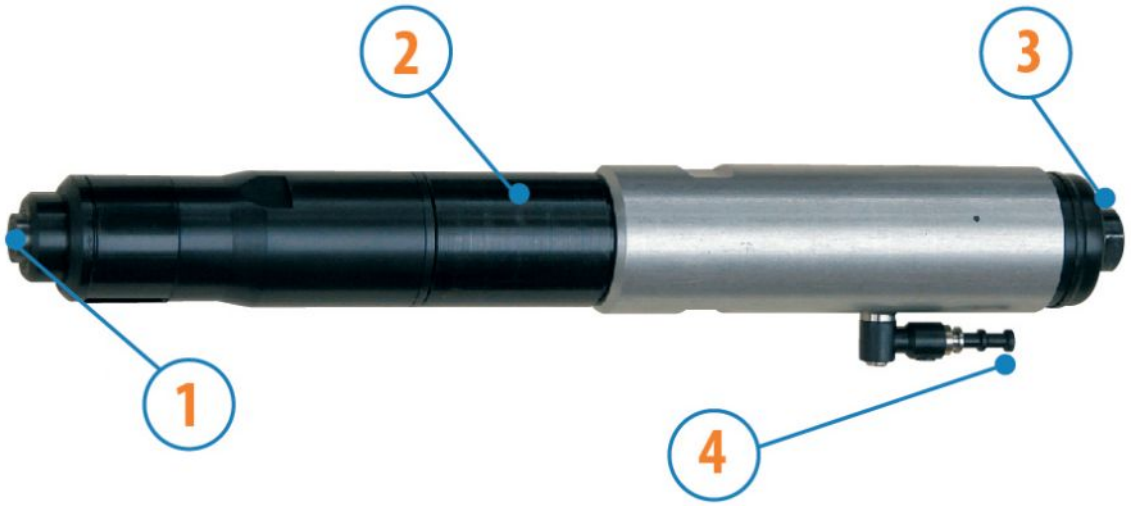


1. 1/4" hexagonal bit holder
2. Grip zone
3. Compressed air inlet
4. Screwing completed signal

## Technical specification

| | |
|---|---|
| Right rotation - Model | ALFB22 AT |
| Right rotation - Code | 8604251 |
| No-load speed - rpm/min | 1000 |
| Torque Nm - Nm | 1,8 - 3,5 |
| Clutch spring | Orange |

## Form features

Standard coupling bit holder 1⁄4“ (6.35 mm)

# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH


Data sheet
**ALFB22 AT**

ALFB ACCU-TRK SERIES - Non reversible


WATT: 190 / CONSUMPTION: 480 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm (*) Optional on ATE version: direct starting for Right and reversible motors.

## Torque Adjustment

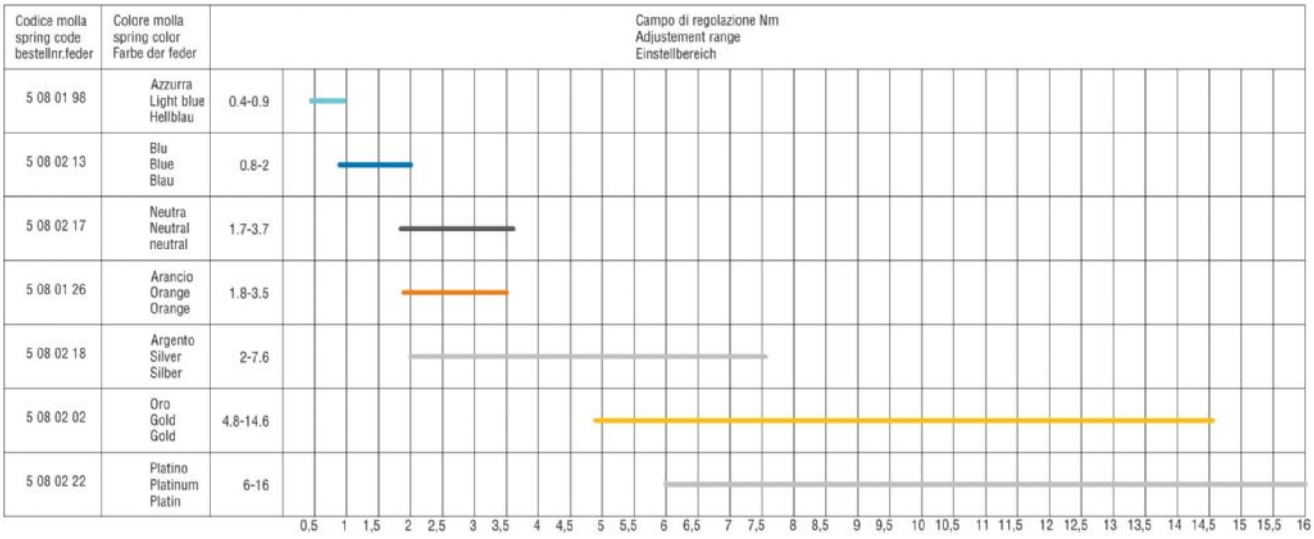


## Overall dimensions

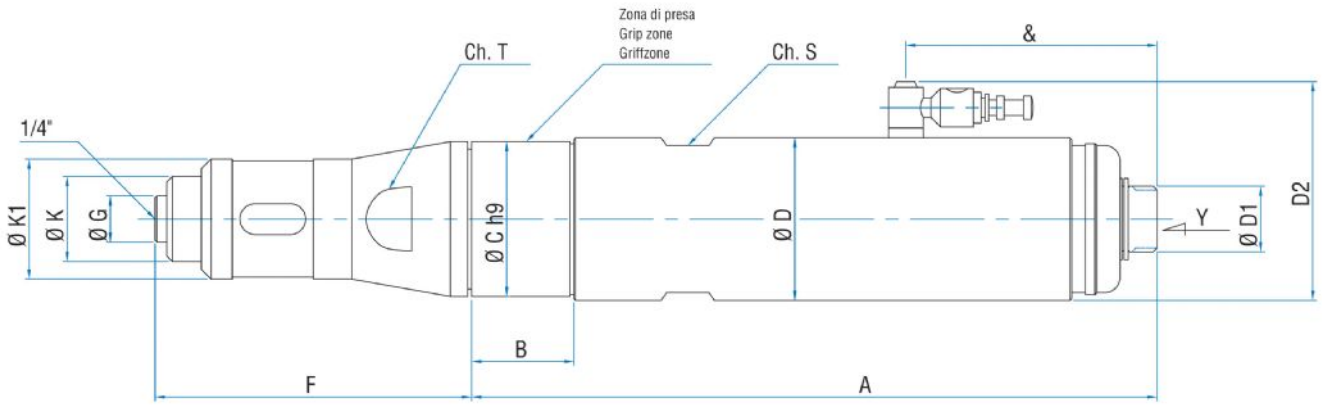

# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
**ALFB22 AT**

ALFB ACCU-TRK SERIES - Non reversible

WATT: 190 / CONSUMPTION: 480 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm (*) Optional on ATE version: direct starting for Right and reversible motors.

| Model | Code | A | B | C | D | D1 | D2 | F | G | K | K1 | S | T | Y | & |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ALFB22 AT | 8604251 | 169,7 | 27,7 | 34 | 38 | 17 | 52,5 | 100 | 12 | 22 | 31 | 34 | 32 | 1/4" | 65 |