MOTORS FOR SCREWDRIVING APPLICATIONS WITH SLIP-TRK CLUTCH

Data sheet
ALGS5R FR

ALGS FR SERIES - Reversible

WATT: 400 / CONSUMPTION: 500 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm



Technical specification

Right rotation - Model	ALGS5R FR
Right rotation - Code	8604218
No-load speed - rpm/min	500
Torque Nm - Nm	12,1
Screws tightening	M5-M6
Clutch spring	Neuter
Clutch unit	7311143

Form features

Allow the tightening torque to be adjusted through a friction clutch.
Output shaft with axial sliding (3 mm), on request without scrolling.
Standard bit holder coupling 1⁄4" (6.35 mm).

MOTORS FOR SCREWDRIVING APPLICATIONS WITH SLIP-TRK CLUTCH


Data sheet
ALGS5R FR

ALGS FR SERIES - Reversible

WATT: 400 / CONSUMPTION: 500 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm

Overall dimensions

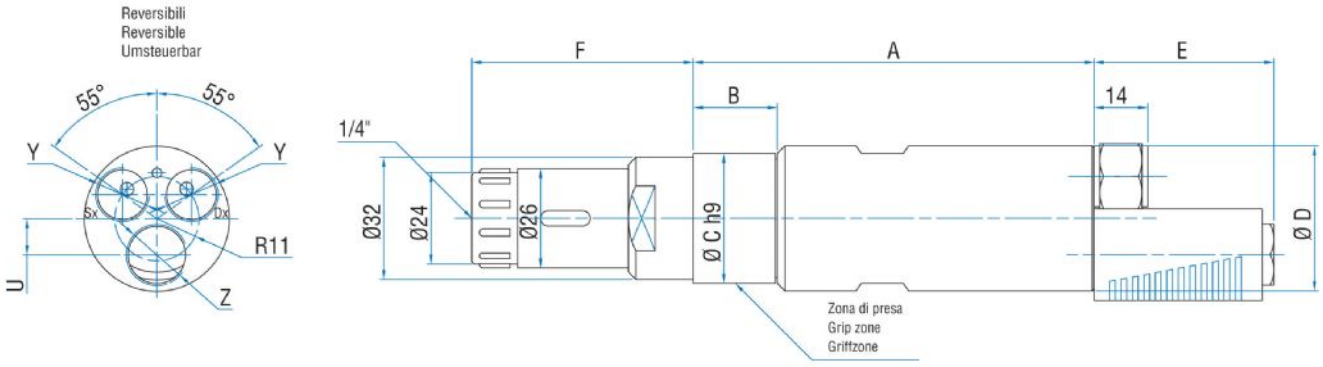

Model	Code	A	B	C	D	E	F	U	V	Y	Z
ALGS5R FR	8604218	143,5	54	40	42	47	56,9	11	13	1/4"	3/8"