
# MOTORS FOR TAPPING MG-MP-MTR SERIES

MTR SERIES - Reversible

WATT: 740 / CONSUMPTION: 1100 Nl/1"

Data sheet
**MTR8**

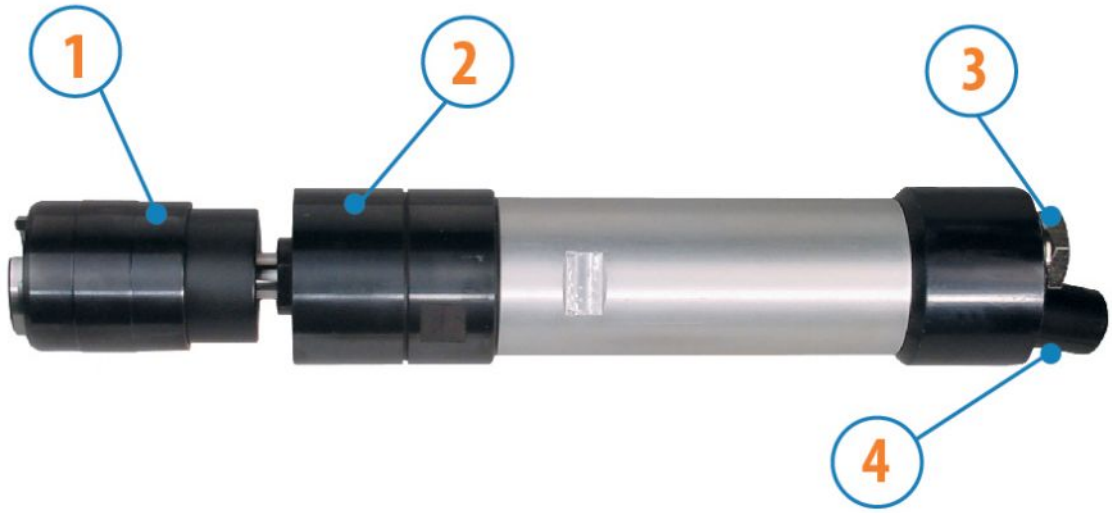


1. Chuck
2. Grip zone
3. Air inlet
4. Air exhaust

## Technical specification

| | |
|---|---|
| Reversible - Model | MTR8 |
| Reversible - Code | 8305522 |
| No-load speed - rpm/min | 600 |
| Torque Nm - Nm | 28 |
| Capacity tapping steel | M12 |
| Chuck connection | B16 |
| Chuck code | 3731004 |

## Form features

The normal delivery condition of the mod- els listed in the table is that with cylindrical body as shown in the photo, and coupling as indicated. Available on request for models from the MTR series and the MP 100 model, are the versions with reversal and command valves already applied to the input air.
REVERSING THE DIRECTION OF ROTATION WITH MOTOR REVERSAL
The motor is reversible and must be connected with a reversal valve. The control valve determines the direction of rotation with right for tapping, and left to unscrew.
The speed of rotation during unscrewing is equal to that during tapping.


# MOTORS FOR TAPPING MG-MP-MTR SERIES

MTR SERIES - Reversible

WATT: 740 / CONSUMPTION: 1100 Nl/1"

Data sheet
**MTR8**

## Overall dimensions

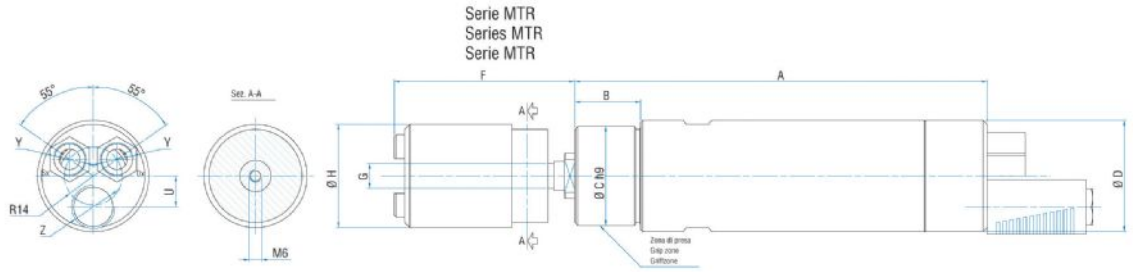


| Model | Code | A | A1 | B | C | D | D1 | F | G | H | U | V | Y | Z |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| MTR8 | 8305522 | 236 | 82 | 67 | 60 | 54 | 67,5 | 91,3 | B16 | 50,8 | 15 | / | 3/8" GAS | 1/2" GAS |