
Drilling unit

TASG series - Pneumatic thrust and return

Chuck connection: B16 ER20 collet holder. Collets in sizes from 1 to 13 mm are available on request on all models. A 16 mm chuck is available on request on the models TASG5, TASG7 and TASG 8.

Data sheet
TASGH

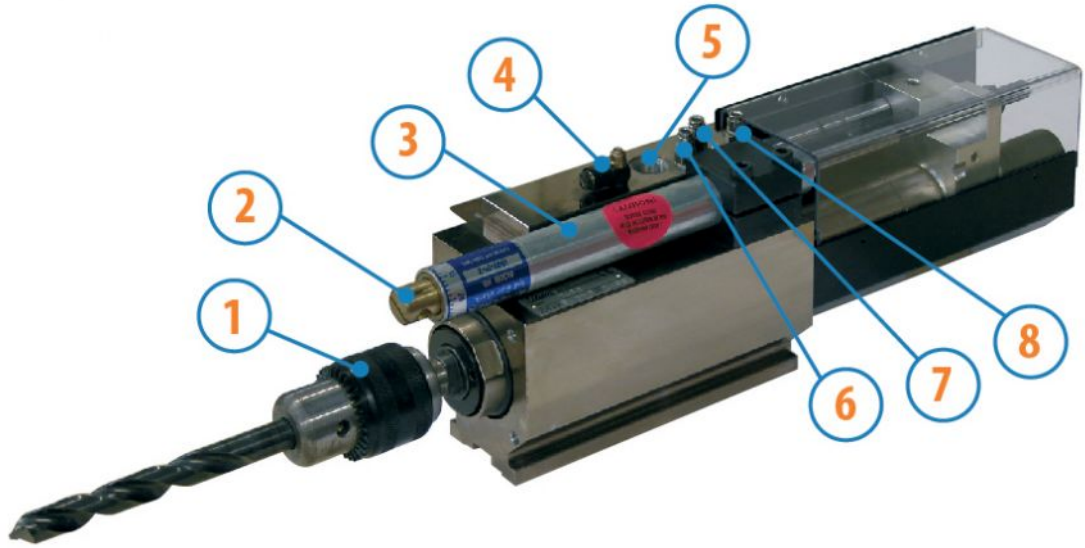

1. Chuck
2. Brake Controller
3. Brake assembly
4. Regulator for feed unit connection
5. Engine power connection
6. End stroke pressure network
7. Adjustment for return connection unit
8. Output signal to the crushing of end stroke

Technical specification

Model	TASGH
Code	8602349
No-load speed - rpm/min	14000
Drilling capacity mm - Wood	6
Drilling capacity mm - Aluminium	3
Drilling capacity mm - Steel	1,5
Total stroke - mm	100
Braked stroke - mm	50
Feed thrust at 6 bar - Kg	100
Power - Watt	450
Power - HP	0,6
Weight - Kg	5,7
Air consumption - Nl/cycle	650
Air	1/4’ GAS
Hose - ø min	10
Standard chuck - Code	ER *