
MOTORS WITH POWER OVER 1000 W

LKW SERIES - Reversible

WATT: 1070 / CONSUMPTION: 1600 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 13 mm

Data sheet
LKW08R

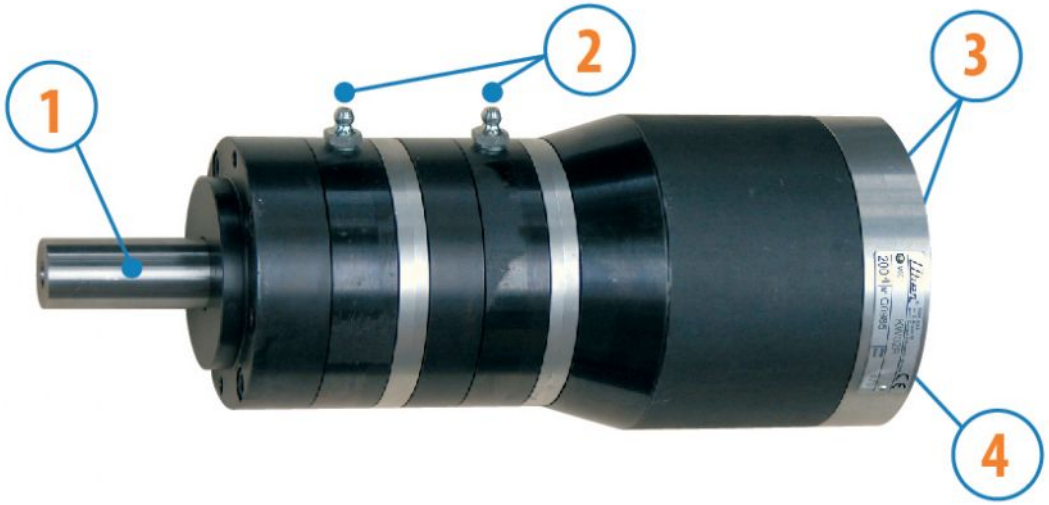

1. Cylindrical keyed shaft
2. Ingrassatori
3. Air inlets
4. Air exhaust


Technical specification


- Model	LKW08R
- Code	8731243
Speed rpm - No-load	600
Speed rpm - at Max Power	320
Torque Nm - at Max Power	24,5
Torque Nm - Stall Torque	28,8

Form features

The normal delivery condition:
cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication / AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP

Characteristic curves

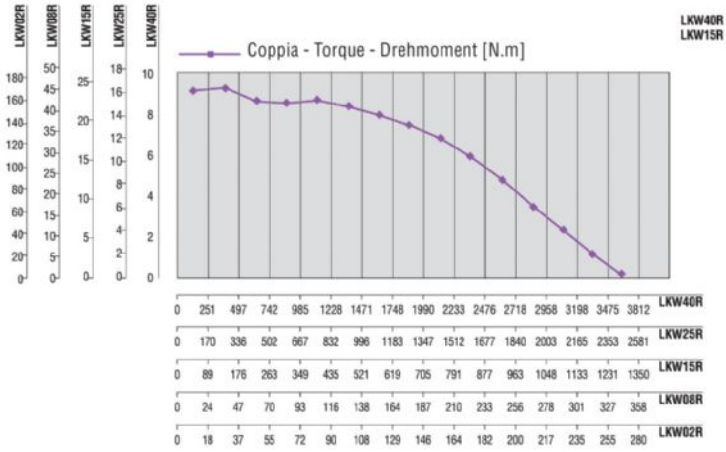

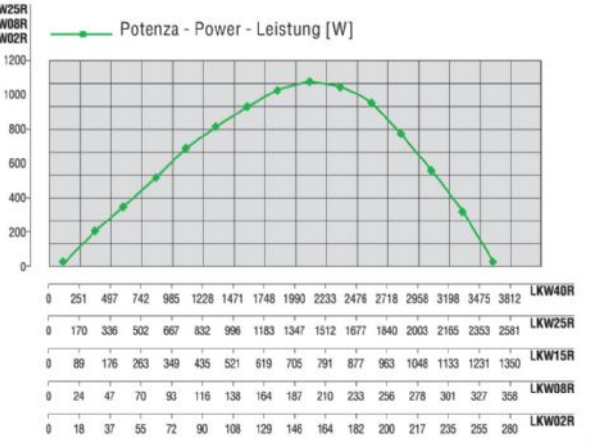

MOTORS WITH POWER OVER 1000 W

LKW SERIES - Reversible

WATT: 1070 / CONSUMPTION: 1600 Nl/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 13 mm

Data sheet
LKW08R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
LKW08R	8731243	2850	3900	7800

Overall dimensions

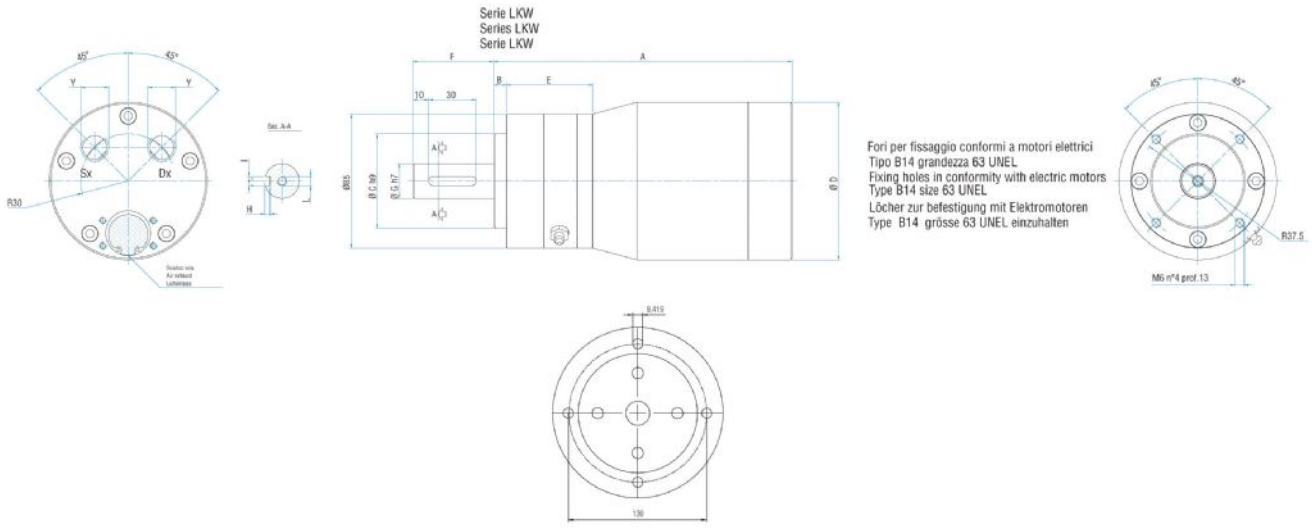

Flange disponibili per alcuni modelli.
Flanges available for some models.
Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	E	F	G	H	I	J	K	L	Y	Z
LKW08R	8731243	238,2	8	60	100	103,8	51,2	22	3,5	6	/	/	M6	3/8"	/