
MOTORS WITH POWER OVER 1000 W

LKW SERIES - Reversible

WATT: 1070 / CONSUMPTION: 1600 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 13 mm

Data sheet
LKW15R

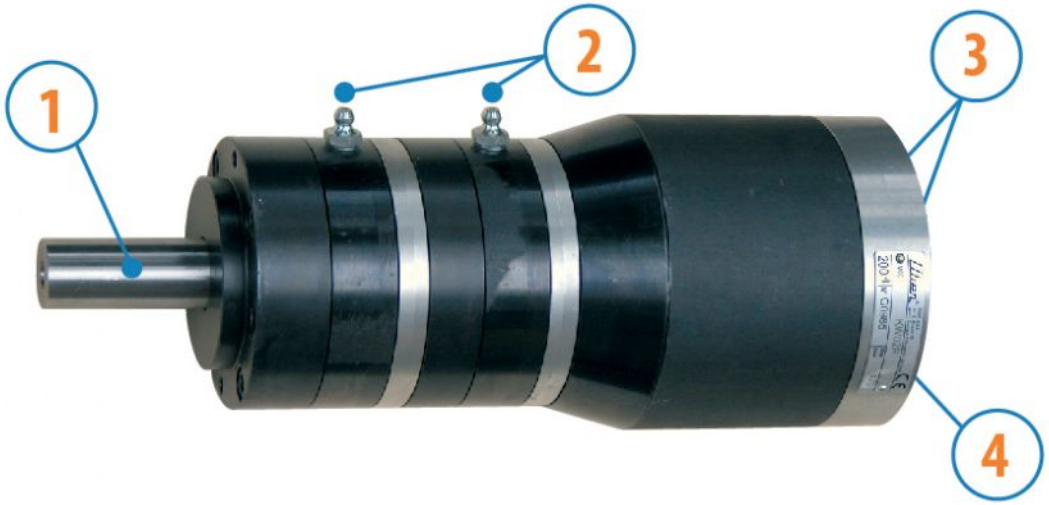

1. Cylindrical keyed shaft
2. Ingrassatori
3. Air inlets
4. Air exhaust


Technical specification


- Model	LKW15R
- Code	8731242
Speed rpm - No-load	1200
Speed rpm - at Max Power	610
Torque Nm - at Max Power	12,8
Torque Nm - Stall Torque	15,1

Form features

The normal delivery condition:
cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication / AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP

Characteristic curves

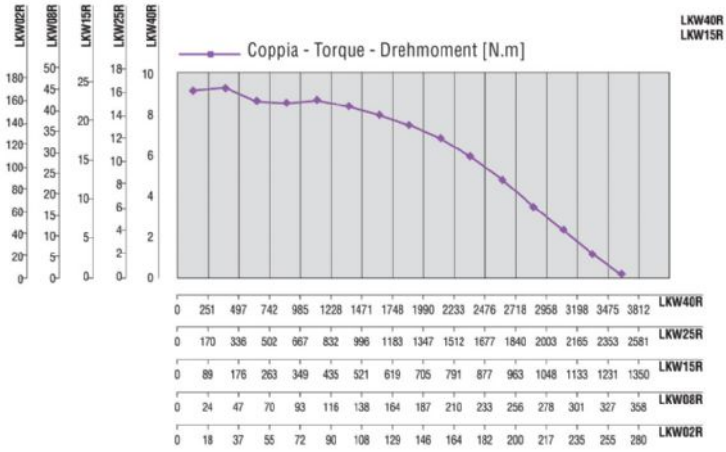

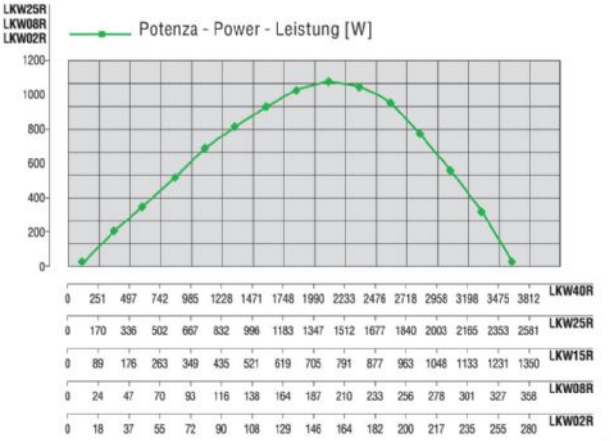

MOTORS WITH POWER OVER 1000 W

LKW SERIES - Reversible

WATT: 1070 / CONSUMPTION: 1600 Nl/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 13 mm

Data sheet
LKW15R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
LKW15R	8731242	2850	3900	7800

Overall dimensions

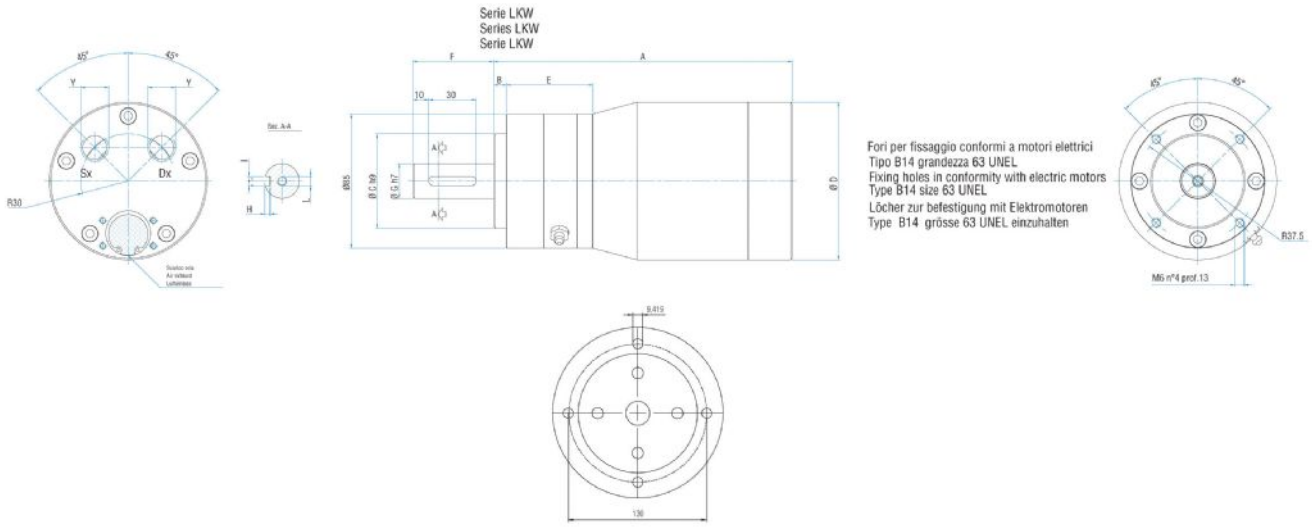

Flange disponibili per alcuni modelli.
Flanges available for some models.
Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	E	F	G	H	I	J	K	L	Y	Z
LKW15R	8731242	189,2	8	60	100	54,8	51,2	22	3,5	6	/	/	M6	3/8"	/