

SLOW MOTORS

LFF SERIES - Reversible

WATT: 160 / CONSUMPTION: 400 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm

Data sheet
LFF120R



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification

- Model	LFF120R
- Code	8731222
Speed rpm - No-load	120
Speed rpm - at Max Power	90
Torque Nm - at Max Power	16
Torque Nm - Stall Torque	29

Form features

The normal delivery condition of the models listed in the table is that with cylindrical shaft and cylindrical body as shown in the photo.

Characteristic curves

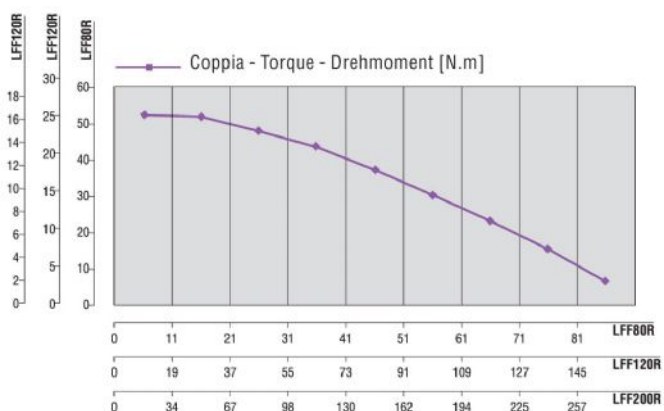

SLOW MOTORS

LFF SERIES - Reversible

WATT: 160 / CONSUMPTION: 400 NI/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm

Data sheet
LFF120R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
LFF120R	8731222	1000	1850	3750

Overall dimensions

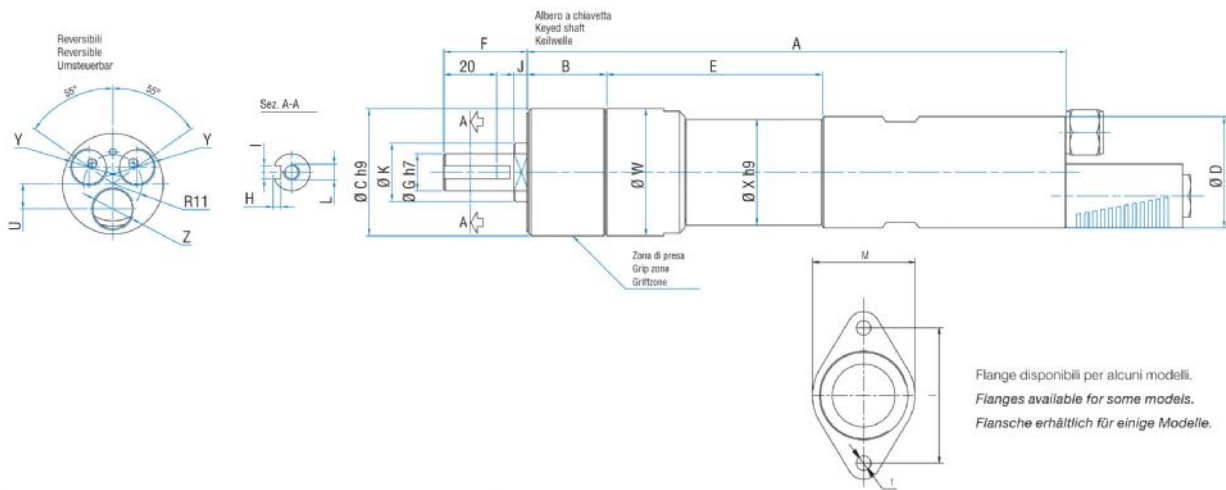

Model	Code	A	B	C	D	E	F	G	H	I	J	K	L	U	V	W	X	Y	Z
LFF120R	8731222	185,7	26,5	40	38	76,2	36	13	3	5	/	/	M5	9,5	11	42	34	1/4"	3/8"