

SLOW MOTORS

LFF SERIES - Reversible

WATT: 160 / CONSUMPTION: 400 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm

Data sheet
LFF80R



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification

- Model	LFF80R
- Code	8731223
Speed rpm - No-load	70
Speed rpm - at Max Power	50
Torque Nm - at Max Power	30
Torque Nm - Stall Torque	51

Form features

The normal delivery condition of the models listed in the table is that with cylindrical shaft and cylindrical body as shown in the photo.

Characteristic curves

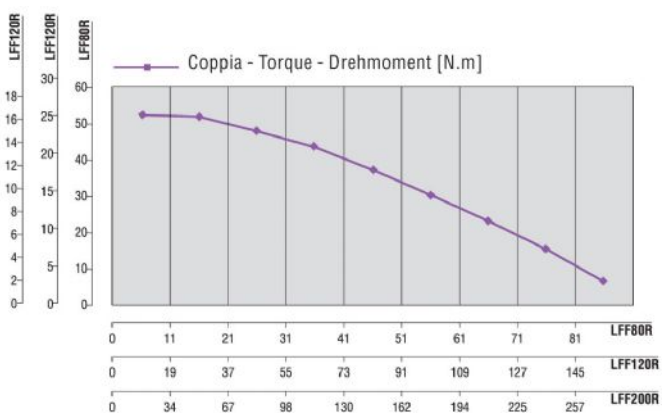

SLOW MOTORS

LFF SERIES - Reversible

WATT: 160 / CONSUMPTION: 400 NI/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm

Data sheet
LFF80R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
LFF80R	8731223	1000	1850	3750

Overall dimensions

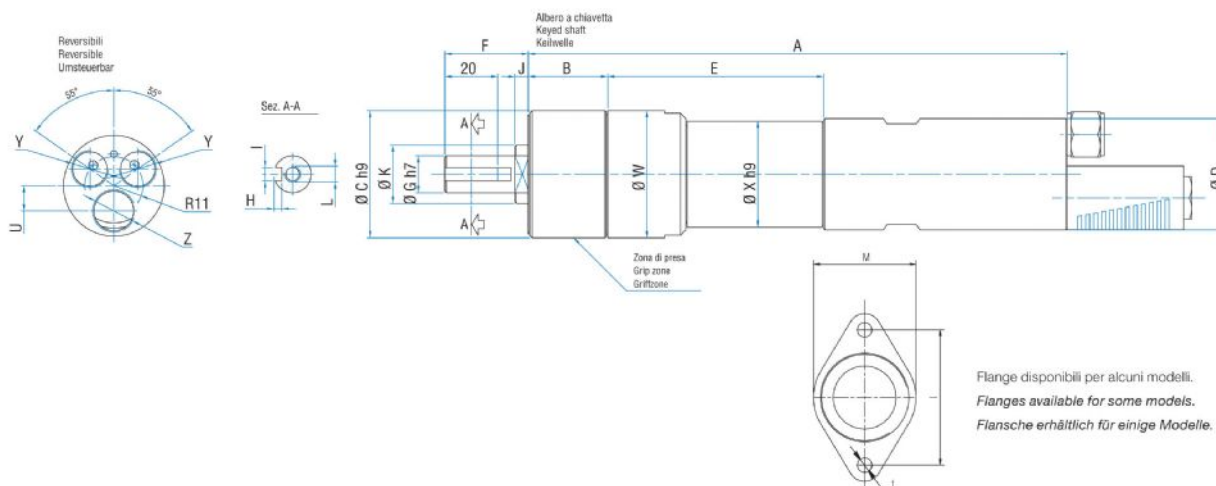

Model	Code	A	B	C	D	E	F	G	H	I	J	K	L	U	V	W	X	Y	Z
LFF80R	8731223	185,7	26,5	40	38	76,2	36	13	3	5	/	/	M5	9,5	11	42	34	1/4"	3/8"