SLOW MOTORS

LGG SERIES - Reversible

WATT: 400 / CONSUMPTION: 560 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm

Data sheet
LGG120R



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification

- Model	LGG120R
- Code	8731216
Speed rpm - No-load	100
Speed rpm - at Max Power	65
Torque Nm - at Max Power	58
Torque Nm - Stall Torque	84

Form features

The normal delivery condition of the models listed in the table is that with cylindrical shaft and cylindrical body as shown in the photo.

Characteristic curves

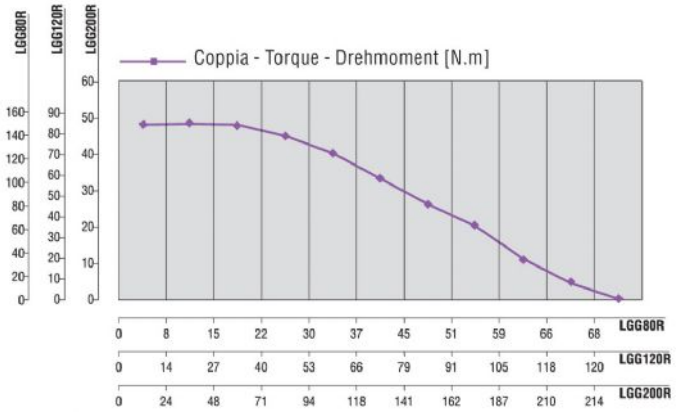



SLOW MOTORS

LGG SERIES - Reversible

WATT: 400 / CONSUMPTION: 560 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm


Data sheet

LGG120R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
LGG120	8731216	2100	2350	4750

Overall dimensions

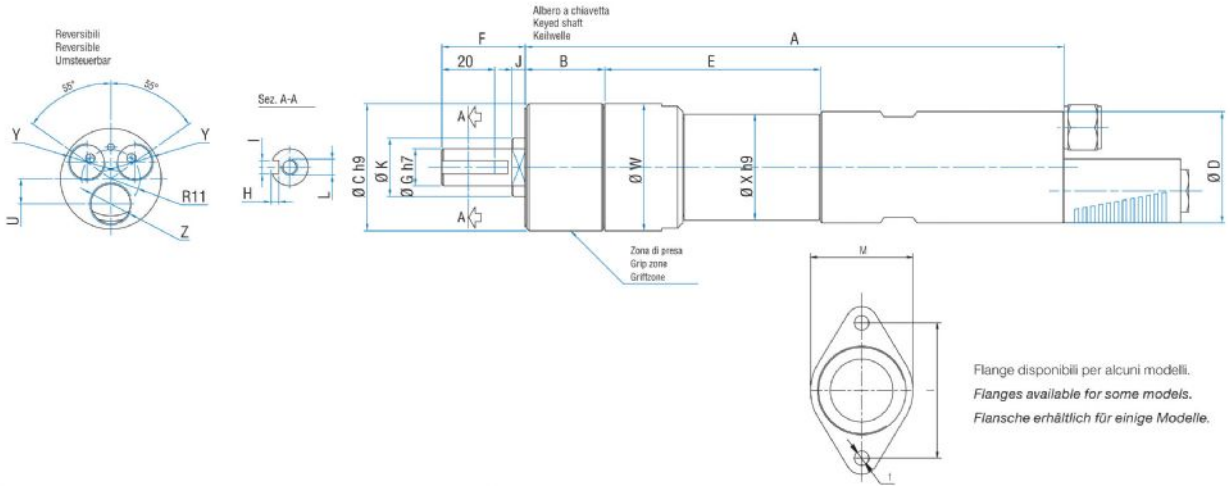

Model	Code	A	B	C	D	E	F	G	H	I	J	K	L	U	V	W	X	Y	Z
LGG120R	8731216	203,5	29,5	48	42	81,5	31,5	14	3	5	5	22	M6	11	13	48	40	1/4"	3/8'