

SLOW MOTORS

LGG SERIES - Reversible

WATT: 400 / CONSUMPTION: 560 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm

Data sheet
LGG15R



- 1. Cylindrical keyed shaft
- 2. Grip zone
- 3. Air inlets
- 4. Air exhaust


Technical specification

- Model	LGG15R
- Code	8731220
Speed rpm - No-load	15
Speed rpm - at Max Power	8
Torque Nm - at Max Power	456
Torque Nm - Stall Torque	657

Form features

The normal delivery condition of the models listed in the table is that with cylindrical shaft and cylindrical body as shown in the photo.

Characteristic curves

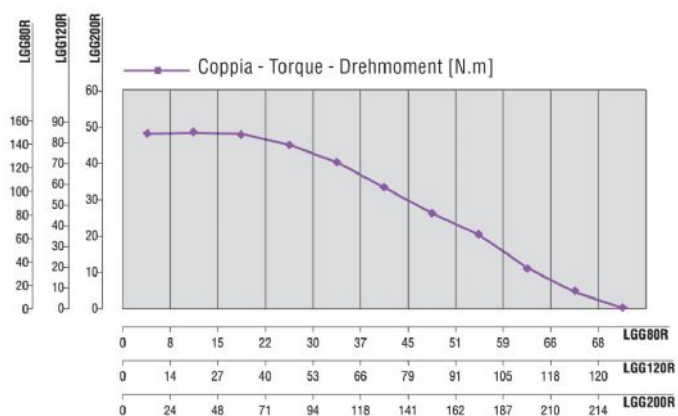

SLOW MOTORS

LGG SERIES - Reversible

WATT: 400 / CONSUMPTION: 560 NI/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm

Data sheet
LGG15R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
LGG15R	8731220	3350	3900	7800

Overall dimensions

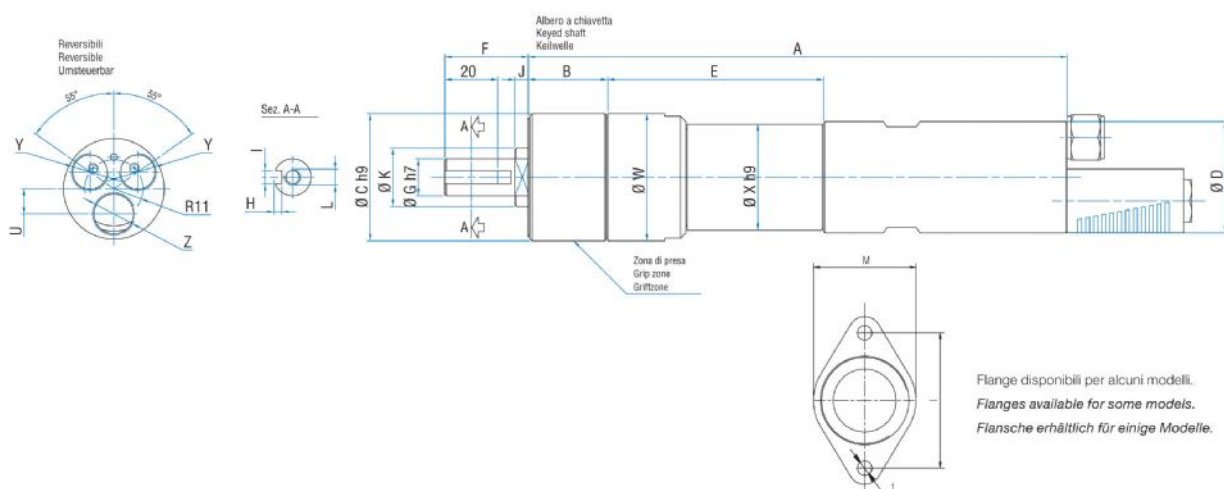

Model	Code	A	B	C	D	E	F	G	H	I	J	K	L	U	V	W	X	Y	Z
LGG15R	8731220	289	110,2	85	42	86,8	38	20	3,5	6	1	30	M6	11	13	48	40	1/4"	3/8"