SLOW MOTORS

LGG SERIES - Reversible

WATT: 400 / CONSUMPTION: 560 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm

Data sheet

LGG80R



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification

- Model	LGG80R
- Code	8731217
Speed rpm - No-load	60
Speed rpm - at Max Power	35
Torque Nm - at Max Power	104
Torque Nm - Stall Torque	150

Form features

The normal delivery condition of the models listed in the table is that with cylindrical shaft and cylindrical body as shown in the photo.

Characteristic curves

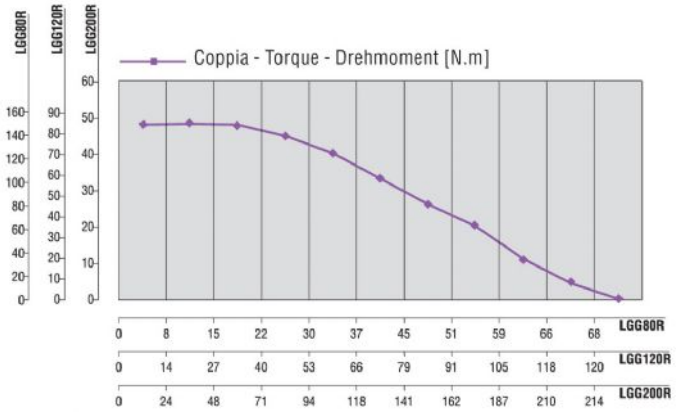



SLOW MOTORS

LGG SERIES - Reversible

WATT: 400 / CONSUMPTION: 560 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm


Data sheet

LGG80R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
LGG80R	8731217	2100	2350	4750

Overall dimensions

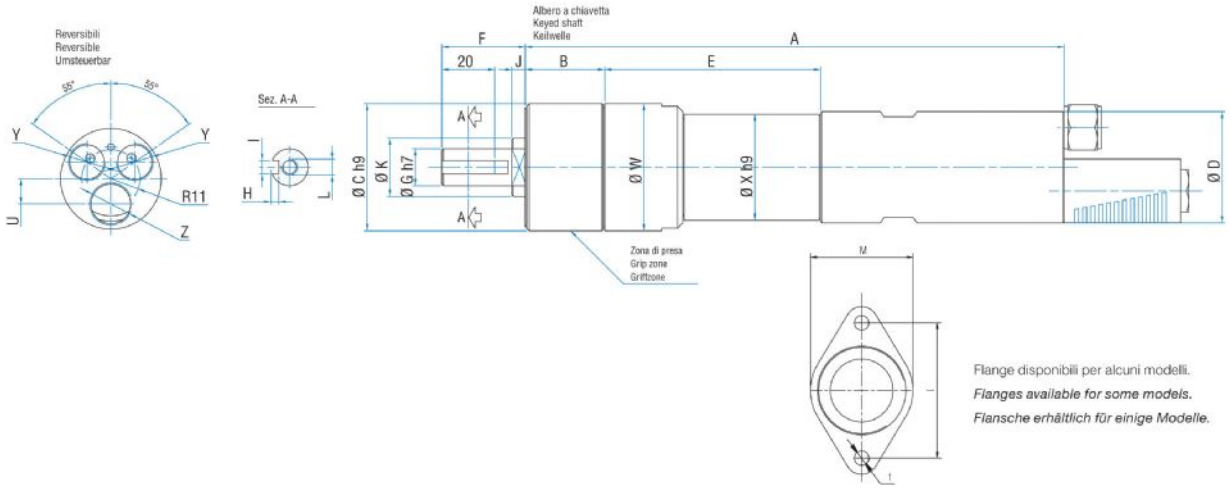

Model	Code	A	B	C	D	E	F	G	H	I	J	K	L	U	V	W	X	Y	Z
LGG80R	8731217	203,5	29,5	48	42	81,5	31,5	14	3	5	5	22	M6	11	13	48	40	1/4"	3/8'