MOTORS WITH POWER UP TO 850 W

LFB SERIES - Reversible

WATT: 160 / CONSUMPTION: 400 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm.

Data sheet
LFB0R



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification


- Model	LFB0R
- Code	8731182
Speed rpm - No-load	5600
Speed rpm - at Max Power	3250
Torque Nm - at Max Power	0,5
Torque Nm - Stall Torque	0,8

Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP
Body
- with diamond flange coupling

Characteristic curves

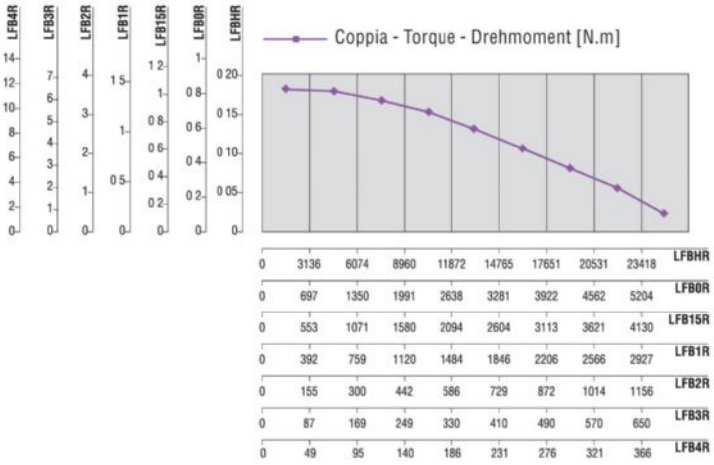

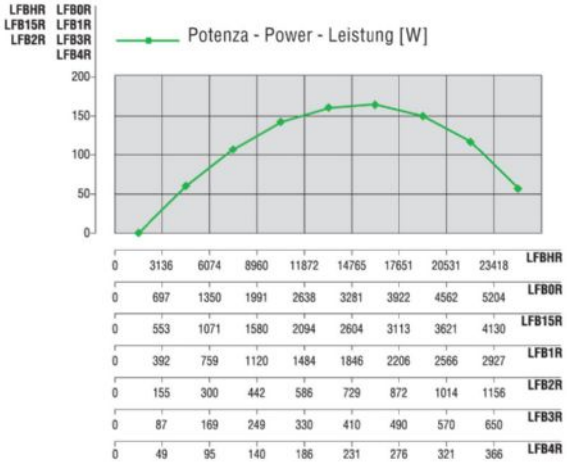

MOTORS WITH POWER UP TO 850 W

LFB SERIES - Reversible

WATT: 160 / CONSUMPTION: 400 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 6 mm.


Data sheet

LFB0R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
LFB0R	8731182	1050	550	2350

Overall dimensions

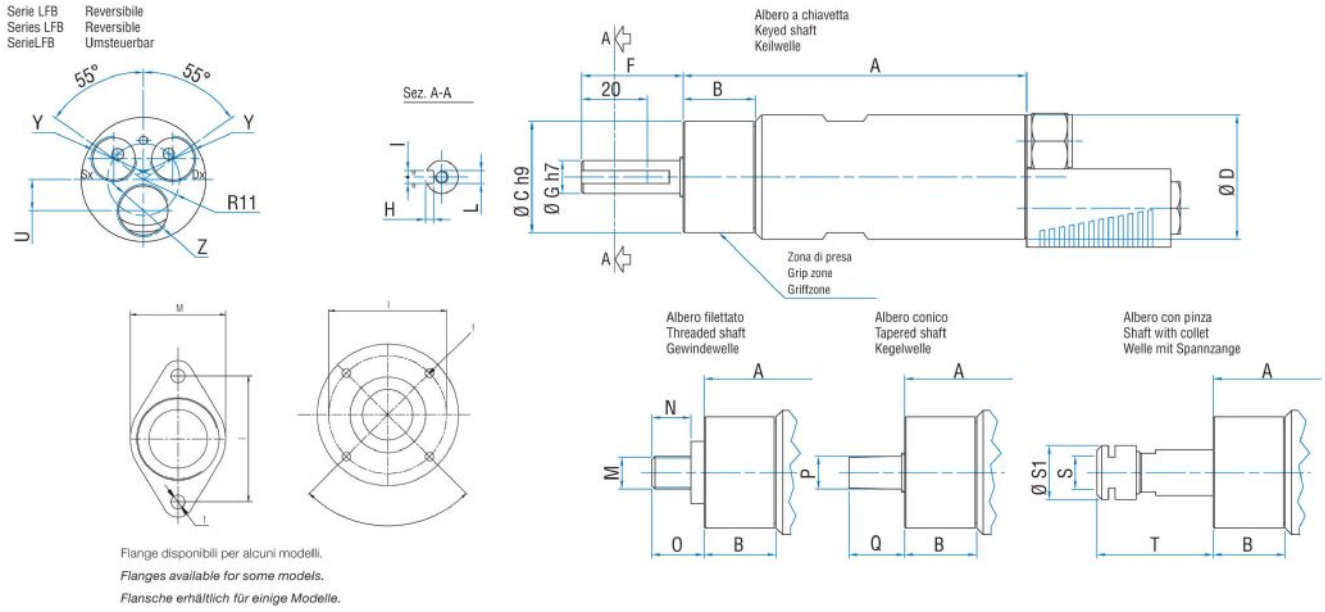

Flange disponibili per alcuni modelli.

Flanges available for some models.

Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S	S1	T
LFB0R	8731182	105	22	34	38	31	10	2,5	4	M4	3/8"x24UNF	12	16	B10	17	ER16	22	4