MOTORS WITH POWER UP TO 850 W

P SERIES - Reversible

WATT: 570 / CONSUMPTION: 830 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet
P40R



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification


- Model	P40R
- Code	8731132
Speed rpm - No-load	3800
Speed rpm - at Max Power	2250
Torque Nm - at Max Power	2,4
Torque Nm - Stall Torque	4,0

Form features

The normal delivery condition:
cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP

Characteristic curves

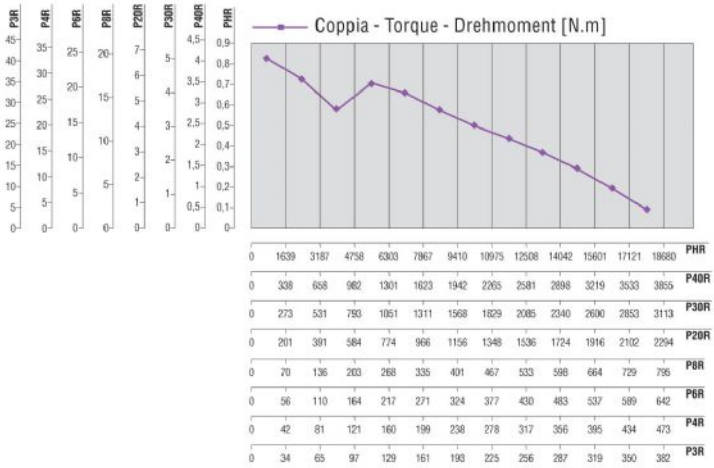

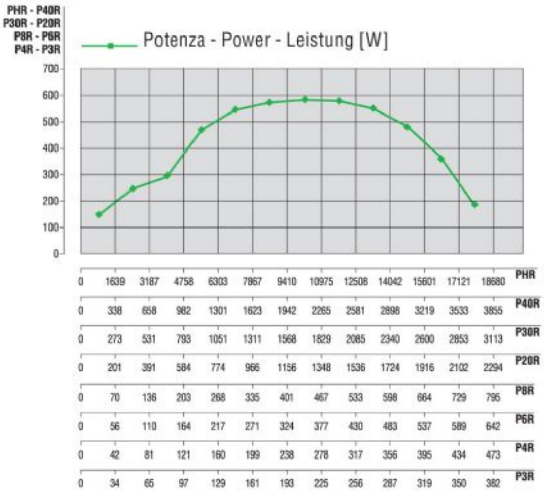

MOTORS WITH POWER UP TO 850 W

P SERIES - Reversible

WATT: 570 / CONSUMPTION: 830 Nl/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet
P40R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
P40R	8731132	2050	2350	4750

Overall dimensions

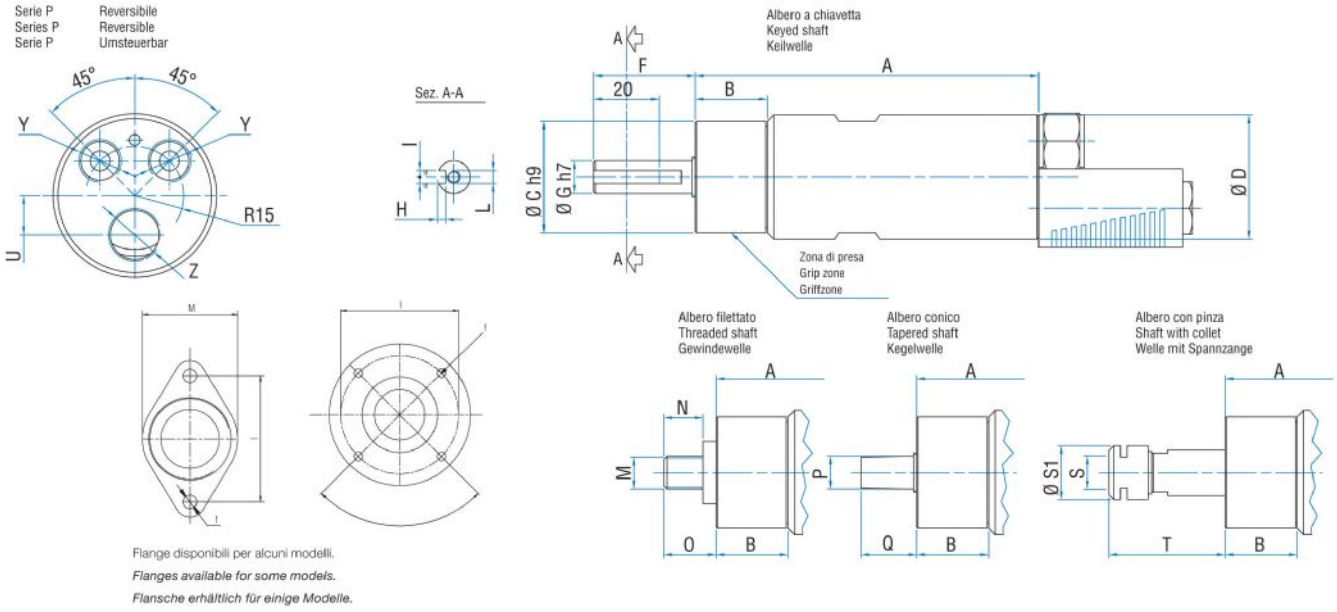

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S	S
P40R	8731132	126	31	48	50	31,5	14	3	5	M6	1/2"x20UNF	16	20,5	B12	26	ER16	2