
MOTORS WITH POWER UP TO 850 W

SLGS SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet
SLGS0R

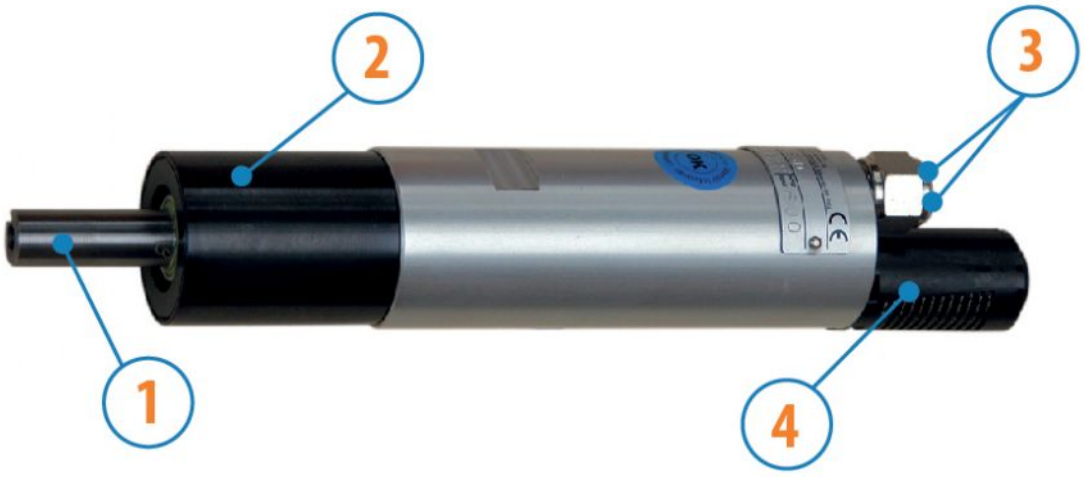

1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification


- Model	SLGS0R
- Code	8731195
Speed rpm - No-load	3500
Speed rpm - at Max Power	1760
Torque Nm - at Max Power	1,9
Torque Nm - Stall Torque	3,2

Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP
Body
- with diamond flange coupling

Characteristic curves

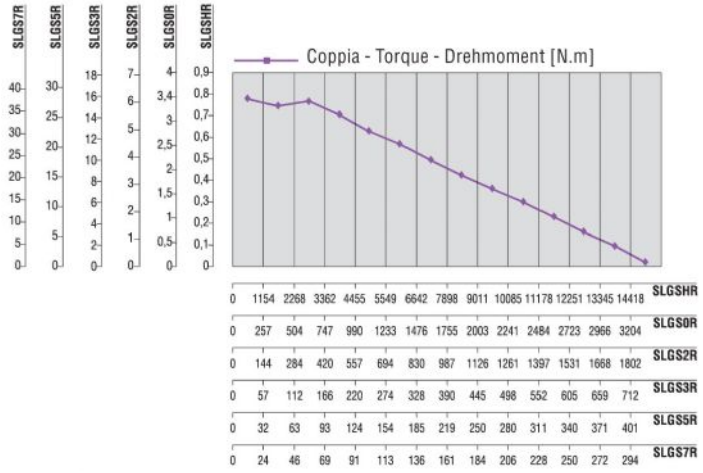

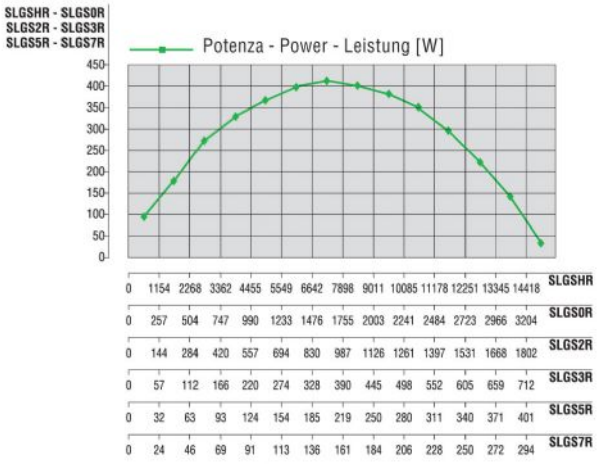

MOTORS WITH POWER UP TO 850 W

SLGS SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 Nl/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet
SLGS0R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
SLGS0R	8731195	1000	1850	3750

Overall dimensions

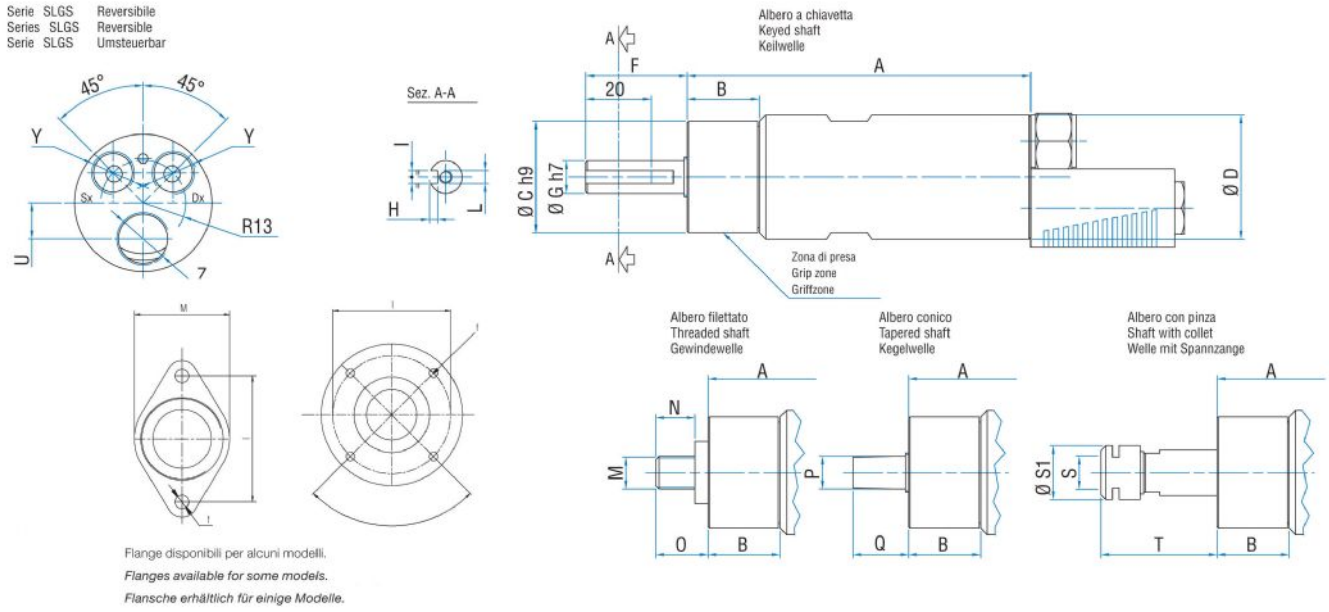

Flange disponibili per alcuni modelli.
Flanges available for some models.
Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S
SLGS0R	8731195	143,5	26,5	40	42	36	13	3	5	M5	1/2"x20UNF	16	20,5	B12	21	ER16