


MOTORS WITH POWER UP TO 850 W

SLGS SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet
SLGS7R

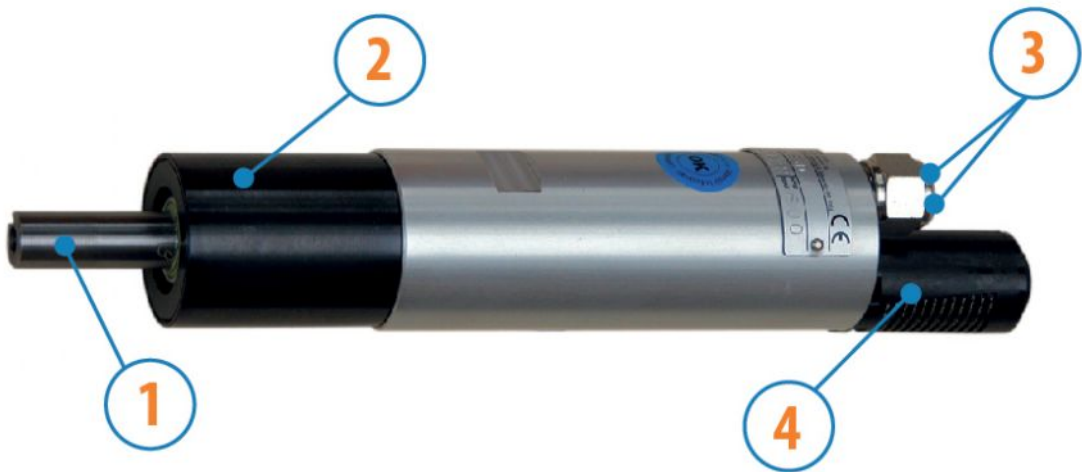

- 1. Cylindrical keyed shaft
- 2. Grip zone
- 3. Air inlets
- 4. Air exhaust



Technical specification

- Model	SLGS7R
- Code	8731199
Speed rpm - No-load	320
Speed rpm - at Max Power	160
Torque Nm - at Max Power	24,2
Torque Nm - Stall Torque	34,3

Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP
Body
- with diamond flange coupling

Characteristic curves

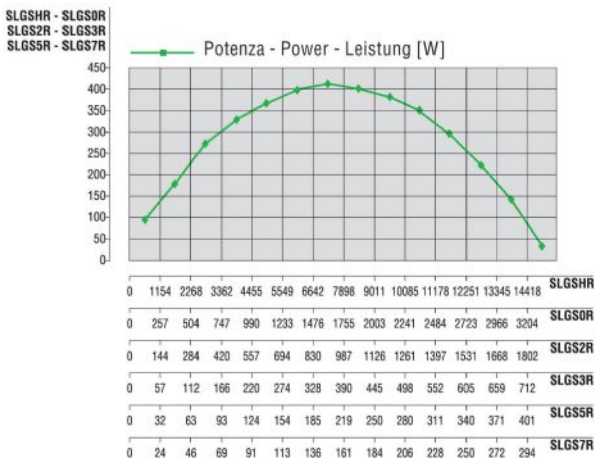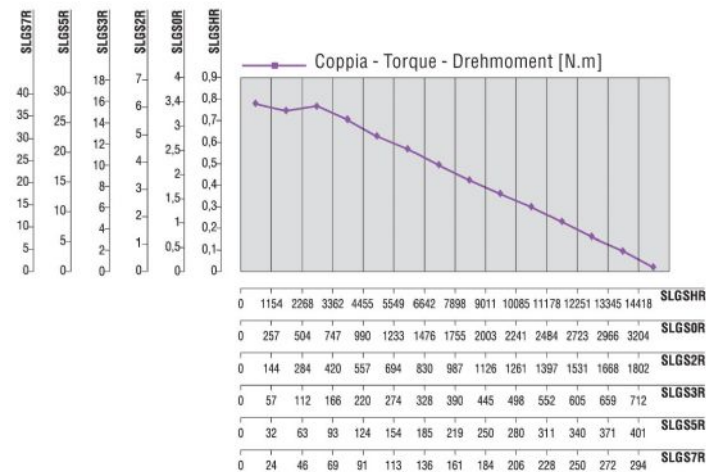

MOTORS WITH POWER UP TO 850 W

SLGS SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm




Data sheet
SLGS7R

Permissible radial and axial loads


Model	Code	Fr (N)	Fa (N)	Co (N)
SLGS7R	8731199	1000	1850	3750

Overall dimensions

Serie SLGS Reversibile
Series SLGS Reversible
Serie SLGS Umsteuerbar



Flange disponibili per alcuni modelli.
Flanges available for some models.
Flansche erhältlich für einige Modelle.

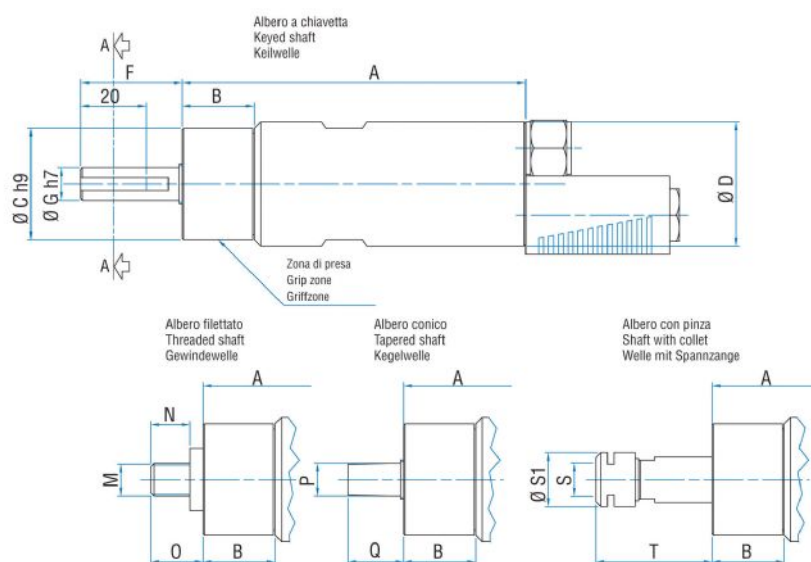

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S
SLGS7R	8731199	168,5	51,5	40	42	36	13	3	5	M5	1/2"x20UNF	16	20,5	B12	21	ER16