
MOTORS WITH POWER UP TO 850 W

SLGS SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet
SLGS7R

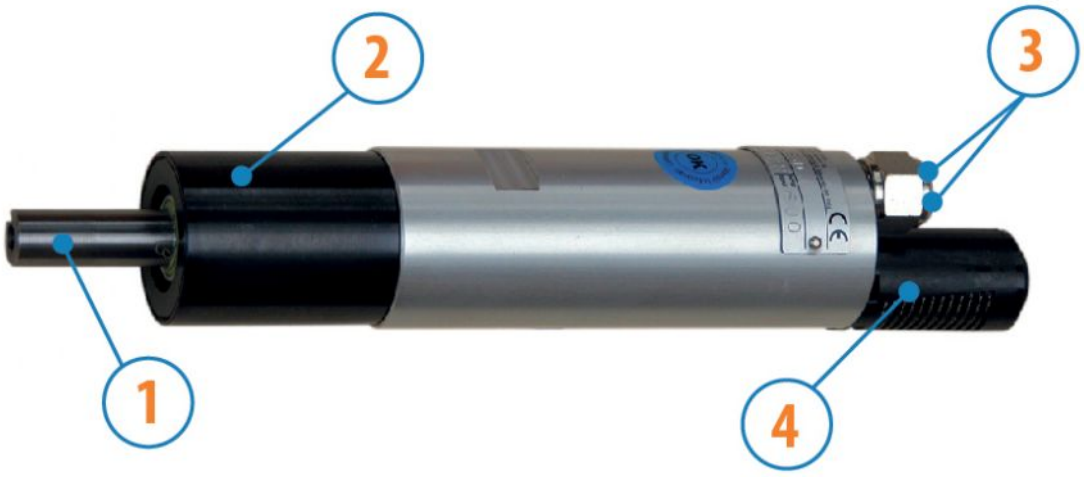

1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification


- Model	SLGS7R
- Code	8731199
Speed rpm - No-load	320
Speed rpm - at Max Power	160
Torque Nm - at Max Power	24,2
Torque Nm - Stall Torque	34,3

Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP
Body
- with diamond flange coupling

Characteristic curves

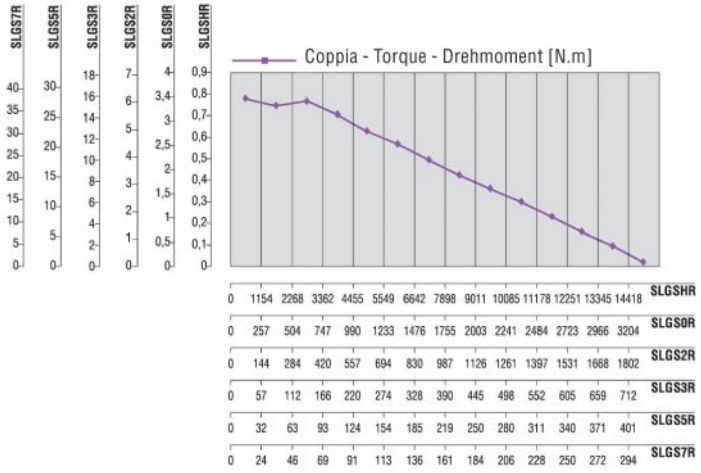

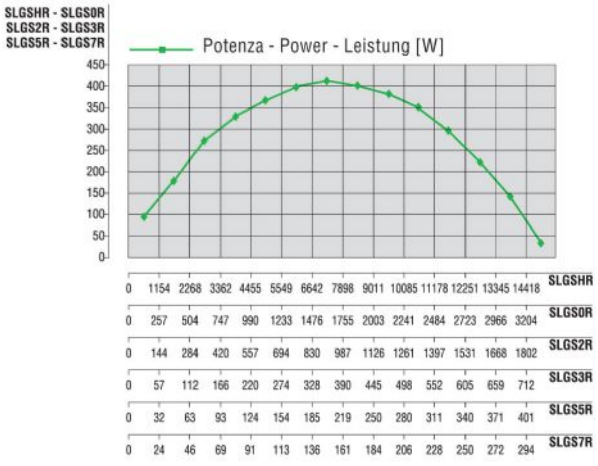

MOTORS WITH POWER UP TO 850 W

SLGS SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 Nl/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet
SLGS7R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
SLGS7R	8731199	1000	1850	3750

Overall dimensions

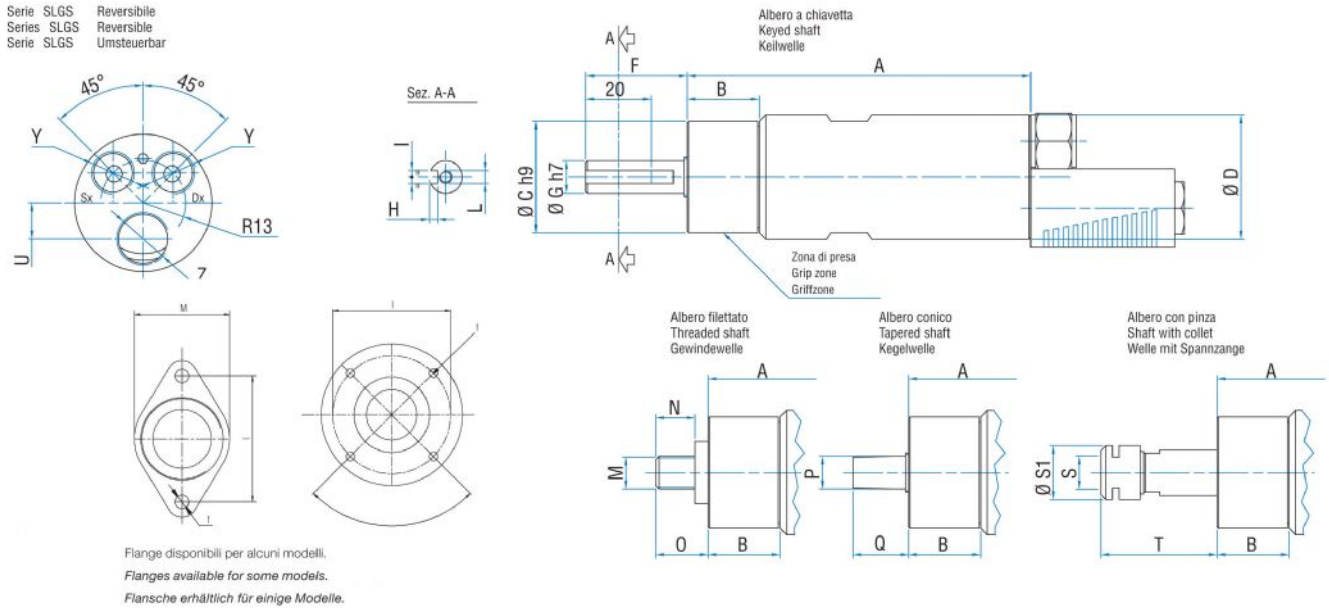

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S
SLGS7R	8731199	168,5	51,5	40	42	36	13	3	5	M5	1/2"x20UNF	16	20,5	B12	21	ER16