
MOTORS WITH POWER UP TO 850 W

SP SERIES - Non reversible

WATT: 800 / CONSUMPTION: 1000 Nl/1"

Data sheet

SP20S

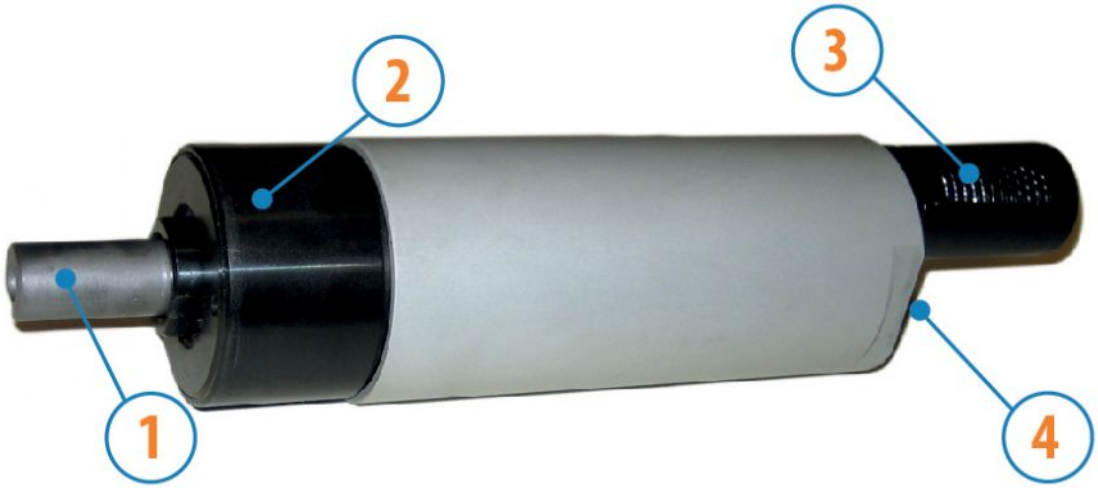

1. Cylindrical keyed shaft
2. Grip zone
3. Air inlet
4. Air exhaust

Technical specification


Left rotation - Model	SP20S
Left rotation - Code	8721253
Speed rpm - No-load	2100
Speed rpm - at Max Power	1015
Torque Nm - at Max Power	7,3
Torque Nm - Stall Torque	15,0


Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication /AP

Body
- with diamond flange coupling

Characteristic curves

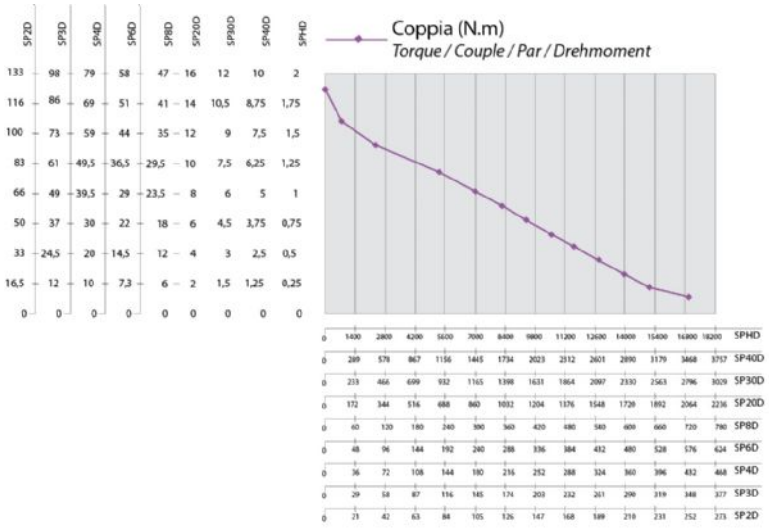

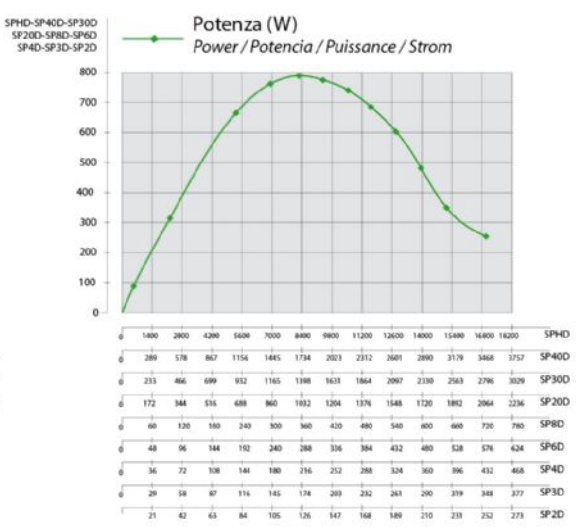

MOTORS WITH POWER UP TO 850 W

SP SERIES - Non reversible

WATT: 800 / CONSUMPTION: 1000 Nl/1"


Data sheet

SP20S

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
SP20S	8721253	2050	2350	4750

Overall dimensions

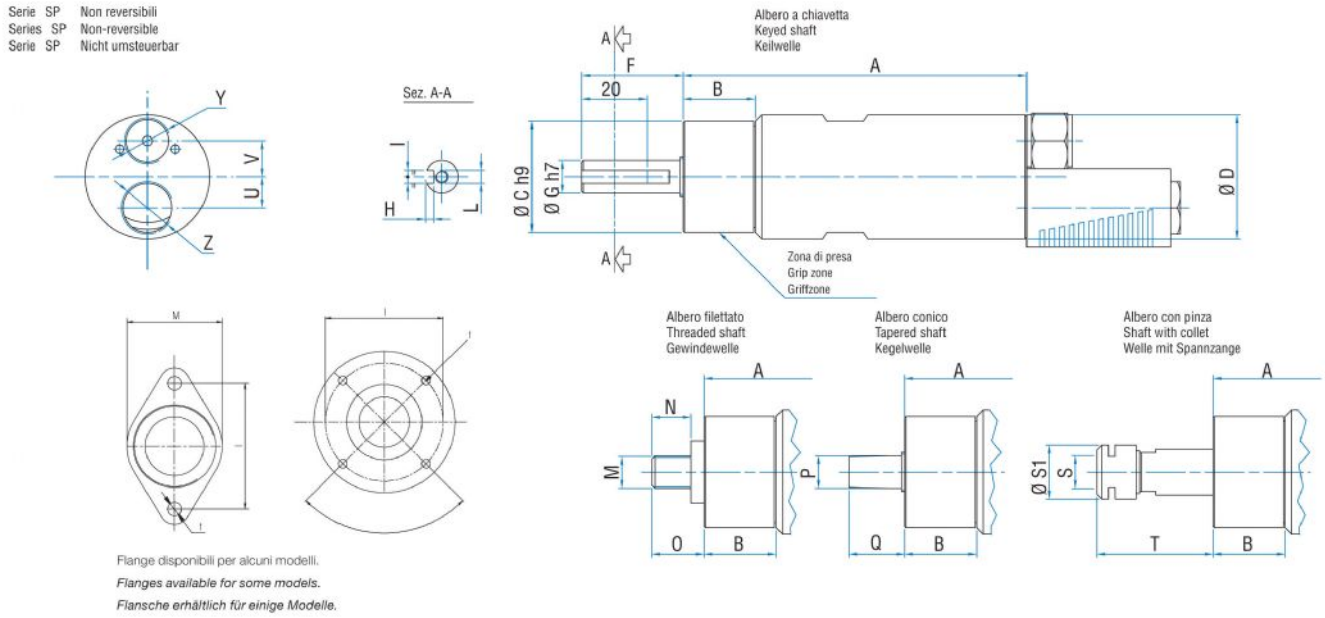

Flange disponibili per alcuni modelli.

Flanges available for some models.

Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S	S
SP20S	8721253	126	31	48	50	31,5	14	3	5	M6	1/2"x20UNF	16	20,5	B12	26	ER16	2