
MOTORS WITH POWER UP TO 850 W

SP SERIES - Non reversible

WATT: 800 / CONSUMPTION: 1000 Nl/1"

Data sheet

SP2D

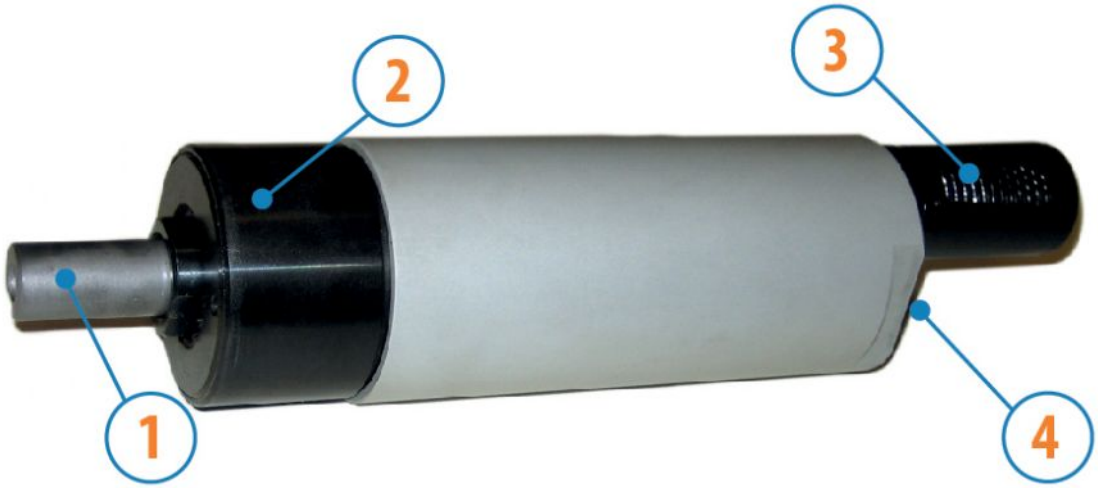

1. Cylindrical keyed shaft
2. Grip zone
3. Air inlet
4. Air exhaust

Technical specification


Right rotation - Model	SP2D
Right rotation - Code	8711258
Speed rpm - No-load	250
Speed rpm - at Max Power	125
Torque Nm - at Max Power	59,0
Torque Nm - Stall Torque	120,0


Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication /AP

Body
- with diamond flange coupling

Characteristic curves

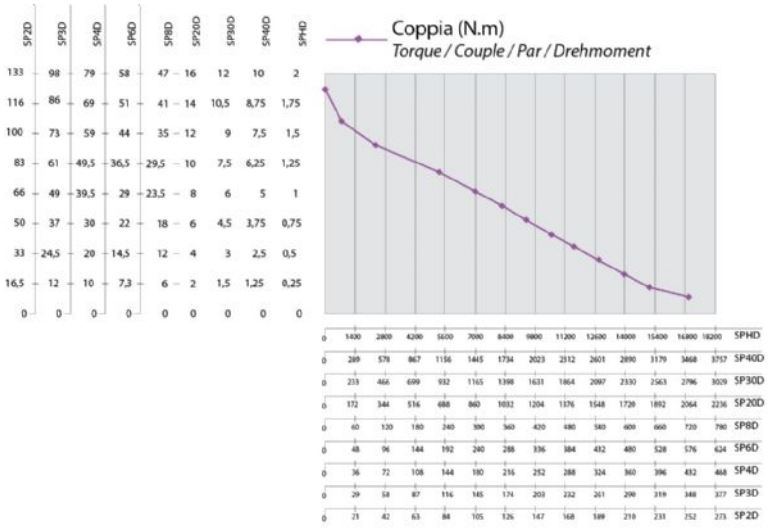

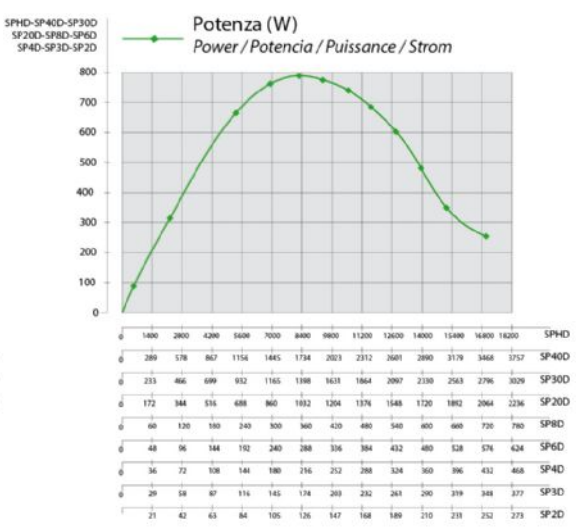

MOTORS WITH POWER UP TO 850 W

SP SERIES - Non reversible

WATT: 800 / CONSUMPTION: 1000 Nl/1"


Data sheet

SP2D

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
SP2D	8711258	2050	2350	4750

Overall dimensions

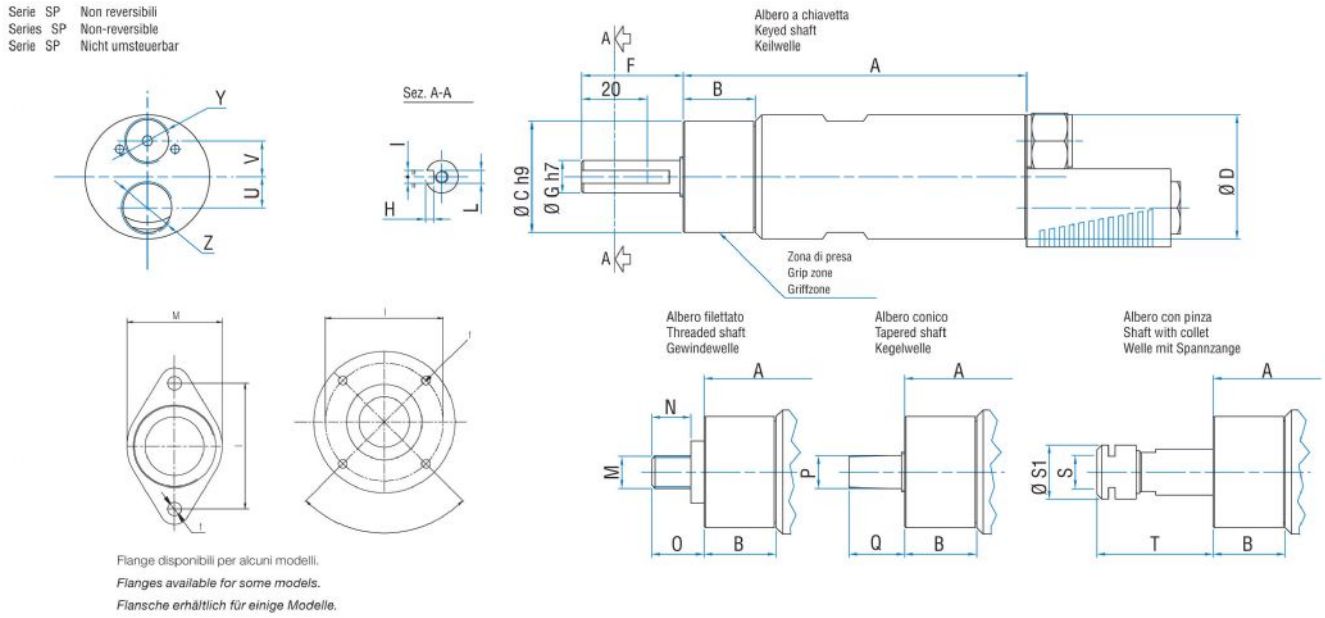

Flange disponibili per alcuni modelli.

Flanges available for some models.

Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S	S
SP2D	8711258	174	59	48	50	31,5	14	3	5	M6	1/2"x20UNF	16	20,5	B12	26	ER16	2