


SP SERIES - Non reversible

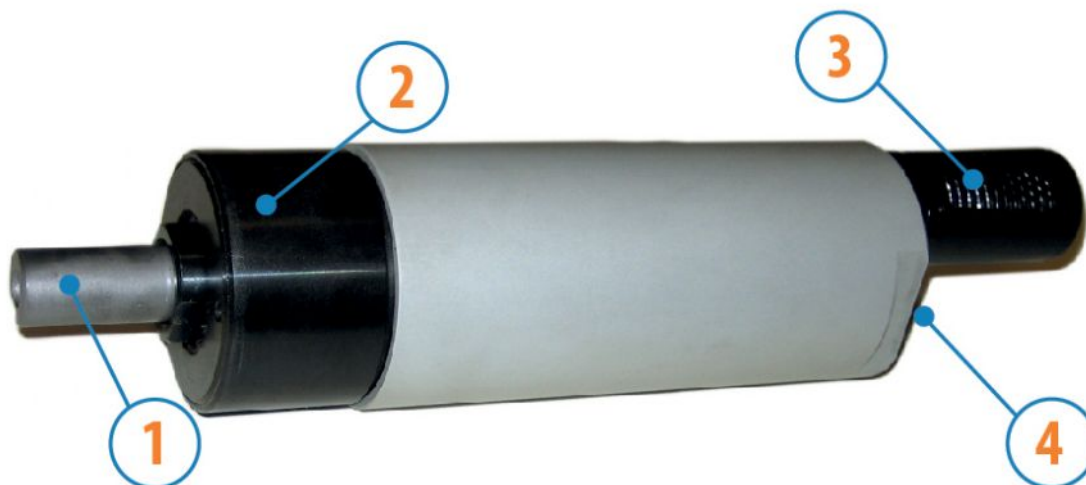

1. Cylindrical keyed shaft
2. Grip zone
3. Air inlet
4. Air exhaust

Technical specification

Left rotation - Model	SP3S
Left rotation - Code	8721257
Speed rpm - No-load	350
Speed rpm - at Max Power	170
Torque Nm - at Max Power	43,5
Torque Nm - Stall Torque	90.0

Form features



The normal delivery condition: cylindrical shaft and body as shown in the photo.

Optional:

Shaft

- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
 - conical - indication /AC
 - with collets - indication /AP
- Body
- with diamond flange coupling

Characteristic curves

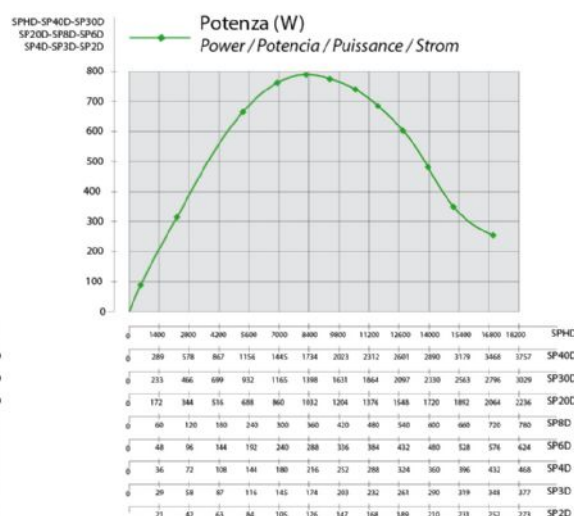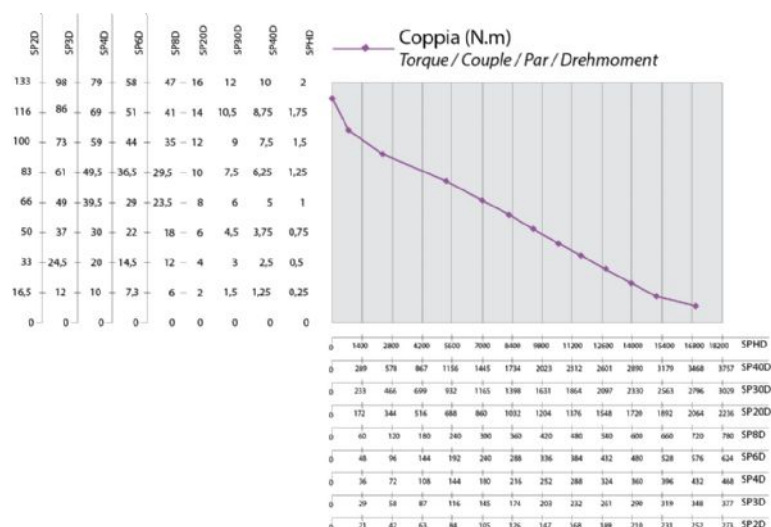

MOTORS WITH POWER UP TO 850 W

SP SERIES - Non reversible

WATT: 800 / CONSUMPTION: 1000 NI/1"




Data sheet
SP3S

Permissible radial and axial loads


Model	Code	Fr (N)	Fa (N)	Co (N)
SP3S	8721257	2050	2350	4750

Overall dimensions

Serie SP Non reversibili
Series SP Non-reversible
Serie SP Nicht umsteuerbar



Flange disponibili per alcuni modelli.
Flanges available for some models.
Flansche erhältlich für einige Modelle.

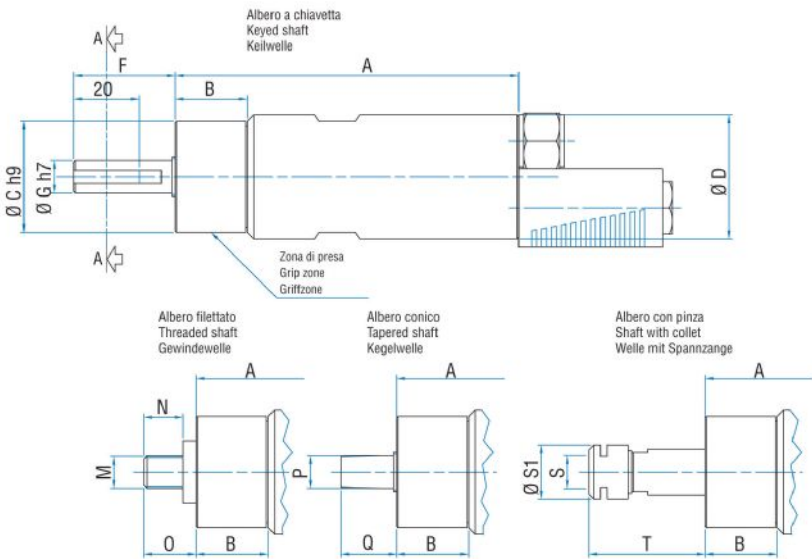

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S	S
SP3S	8721257	154	59	48	50	31,5	14	3	5	M6	1/2"x20UNF	16	20,5	B12	26	ER16	2