
MOTORS WITH POWER UP TO 850 W

SP SERIES - Non reversible

WATT: 800 / CONSUMPTION: 1000 Nl/1"

Data sheet

SP3S

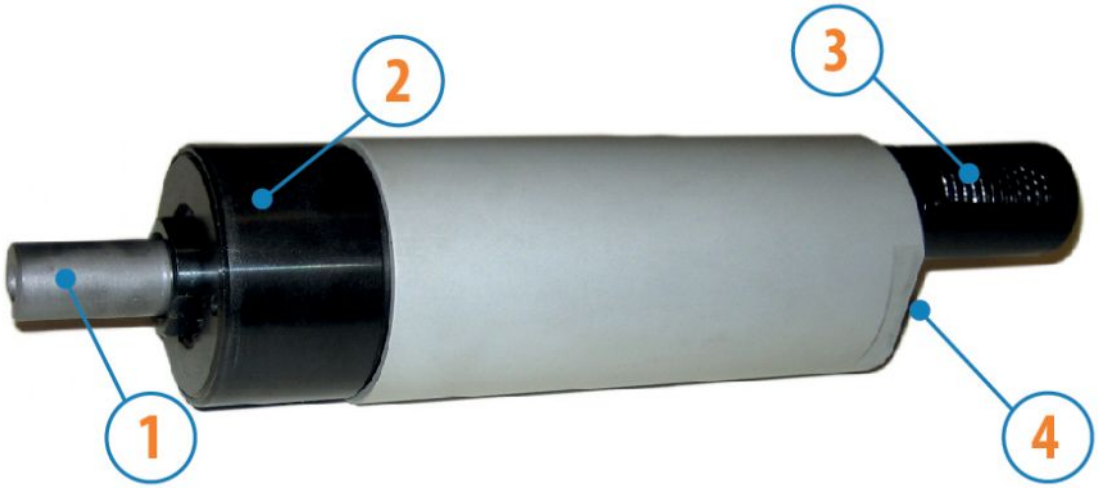

1. Cylindrical keyed shaft
2. Grip zone
3. Air inlet
4. Air exhaust

Technical specification


Left rotation - Model	SP3S
Left rotation - Code	8721257
Speed rpm - No-load	350
Speed rpm - at Max Power	170
Torque Nm - at Max Power	43,5
Torque Nm - Stall Torque	90,0


Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication /AP

Body
- with diamond flange coupling

Characteristic curves

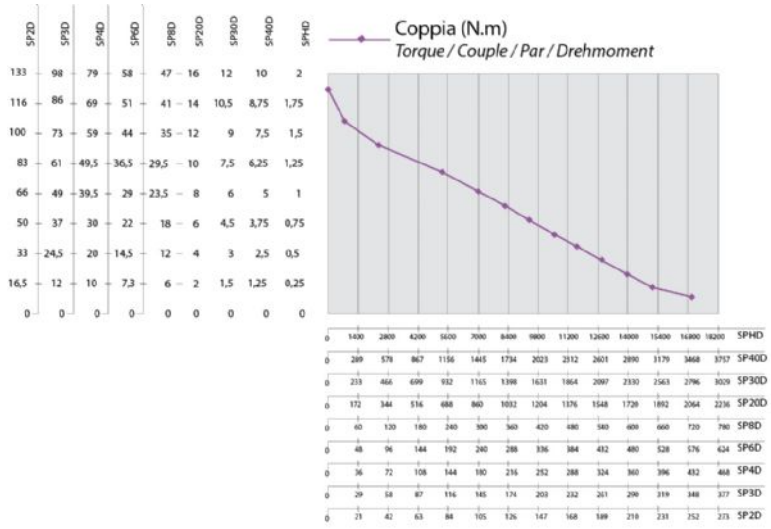

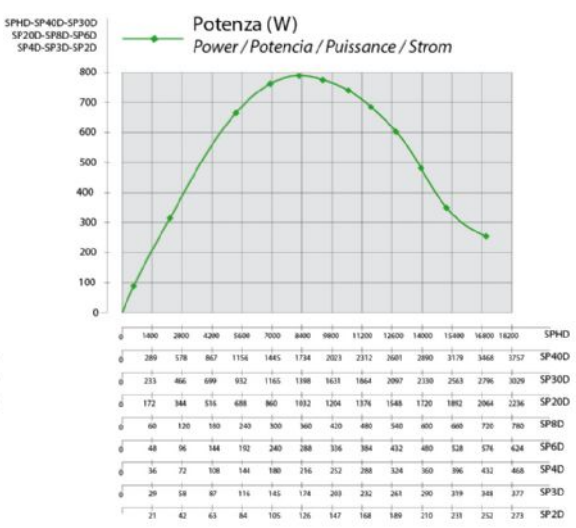

MOTORS WITH POWER UP TO 850 W

SP SERIES - Non reversible

WATT: 800 / CONSUMPTION: 1000 Nl/1"


Data sheet

SP3S

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
SP3S	8721257	2050	2350	4750

Overall dimensions

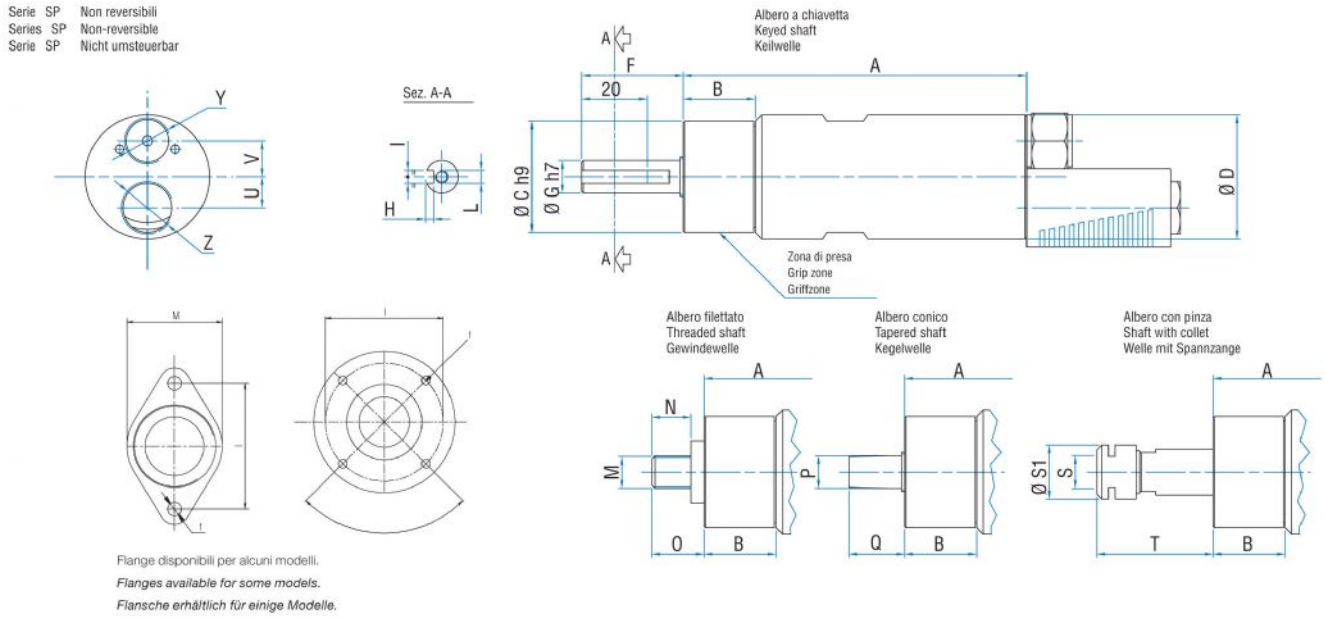

Flange disponibili per alcuni modelli.

Flanges available for some models.

Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S	S
SP3S	8721257	154	59	48	50	31,5	14	3	5	M6	1/2"x20UNF	16	20,5	B12	26	ER16	2