
MOTORS WITH POWER UP TO 850 W

SP SERIES - Non reversible

WATT: 800 / CONSUMPTION: 1000 Nl/1"

Data sheet

SP6D

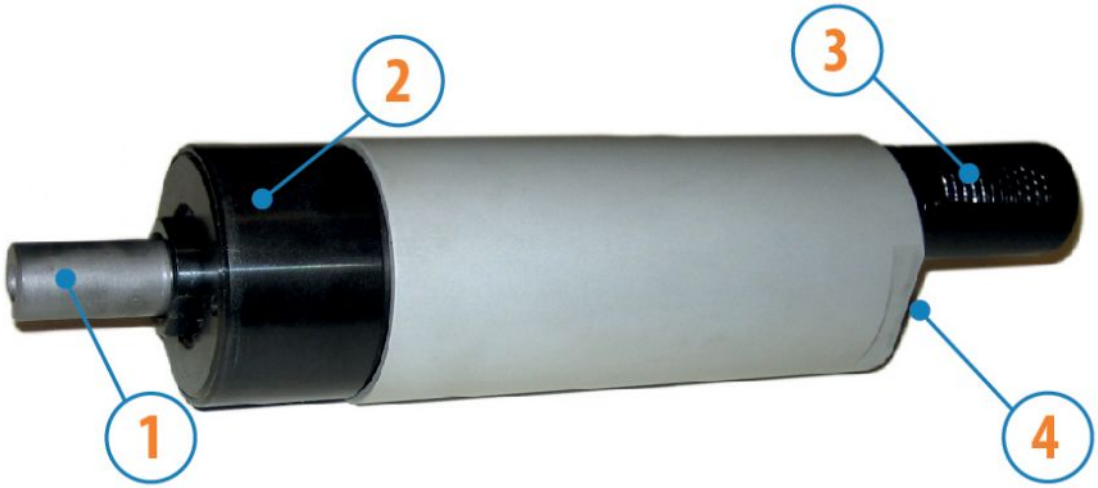

1. Cylindrical keyed shaft
2. Grip zone
3. Air inlet
4. Air exhaust

Technical specification


Right rotation - Model	SP6D
Right rotation - Code	8711255
Speed rpm - No-load	580
Speed rpm - at Max Power	285
Torque Nm - at Max Power	26,0
Torque Nm - Stall Torque	53,0


Form features

The normal delivery condition: cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication /AP

Body
- with diamond flange coupling

Characteristic curves

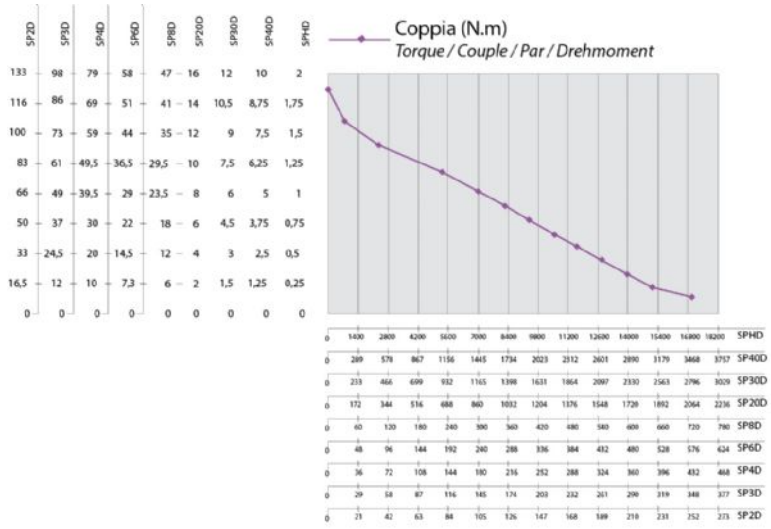

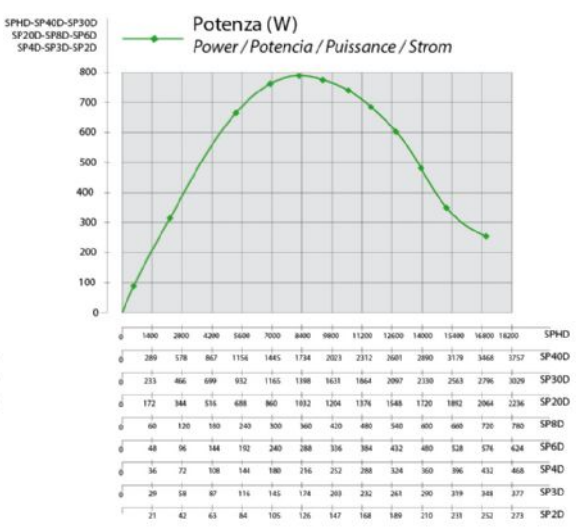

MOTORS WITH POWER UP TO 850 W

SP SERIES - Non reversible

WATT: 800 / CONSUMPTION: 1000 Nl/1"


Data sheet

SP6D

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
SP6D	8711255	2050	2350	4750

Overall dimensions

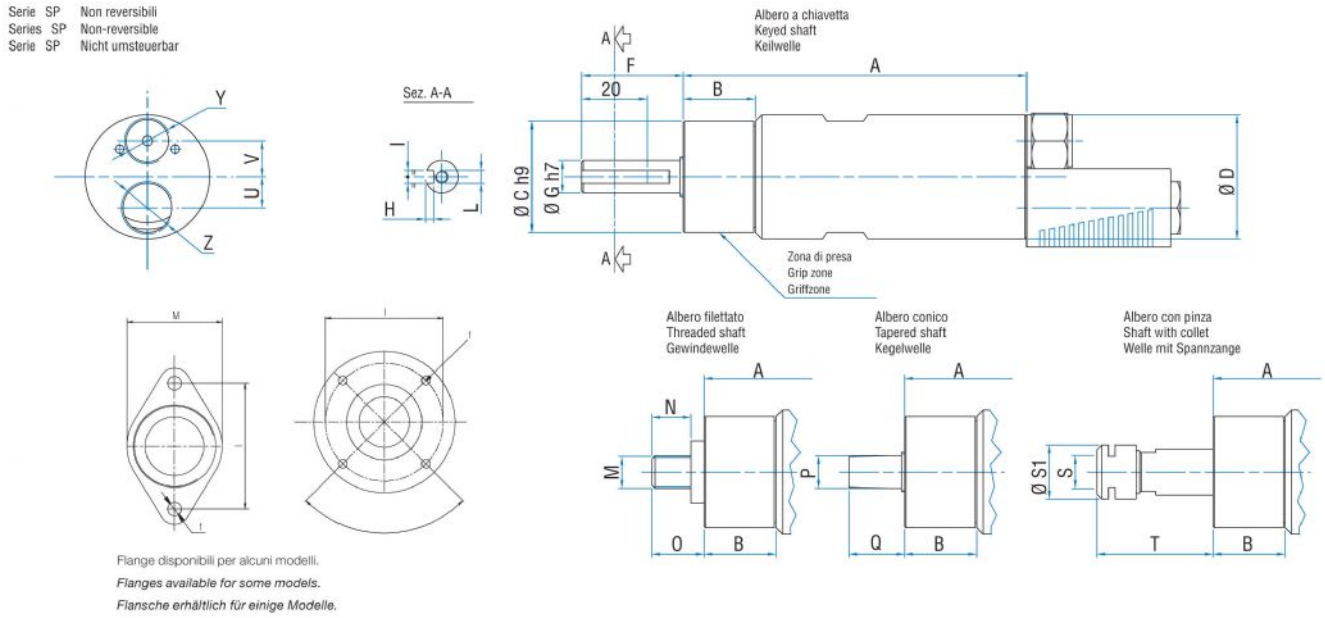

Flange disponibili per alcuni modelli.

Flanges available for some models.

Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q	S	S
SP6D	8711255	174	59	48	50	31,5	14	3	5	M6	1/2"x20UNF	16	20,5	B12	26	ER16	2