MOTORS WITH POWER UP TO 850 W

T SERIES - Reversible

WATT: 740 / CONSUMPTION: 1100 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 12 mm

Data sheet

T04R



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification


- Model	T04R
- Code	8731207
Speed rpm - No-load	330
Speed rpm - at Max Power	170
Torque Nm - at Max Power	41
Torque Nm - Stall Torque	62,8

Form features

The normal delivery condition:
cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP

Characteristic curves

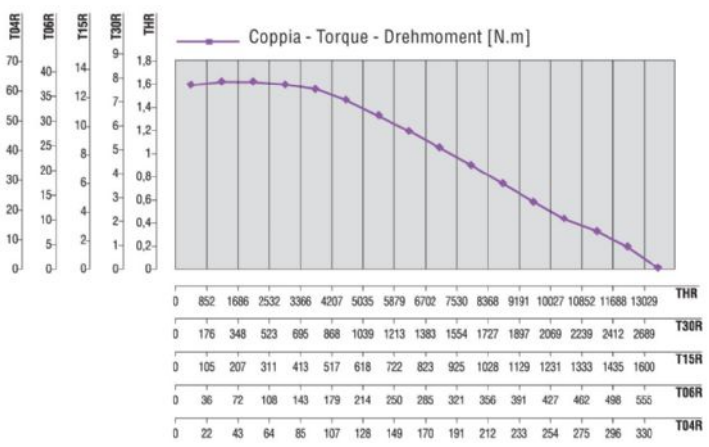

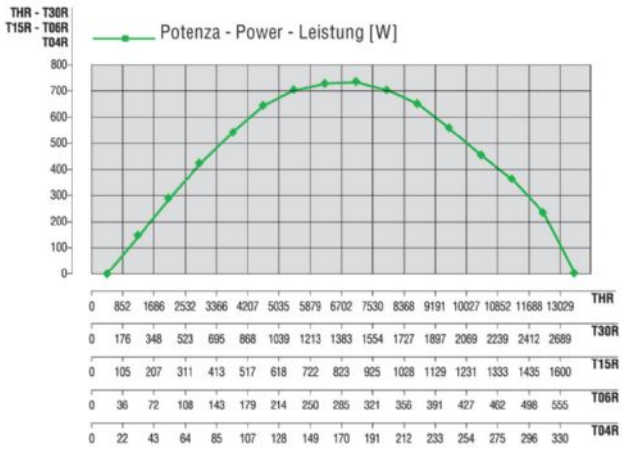

MOTORS WITH POWER UP TO 850 W

T SERIES - Reversible

WATT: 740 / CONSUMPTION: 1100 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 12 mm


Data sheet

T04R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
T04R	8731207	2050	2350	4750

Overall dimensions

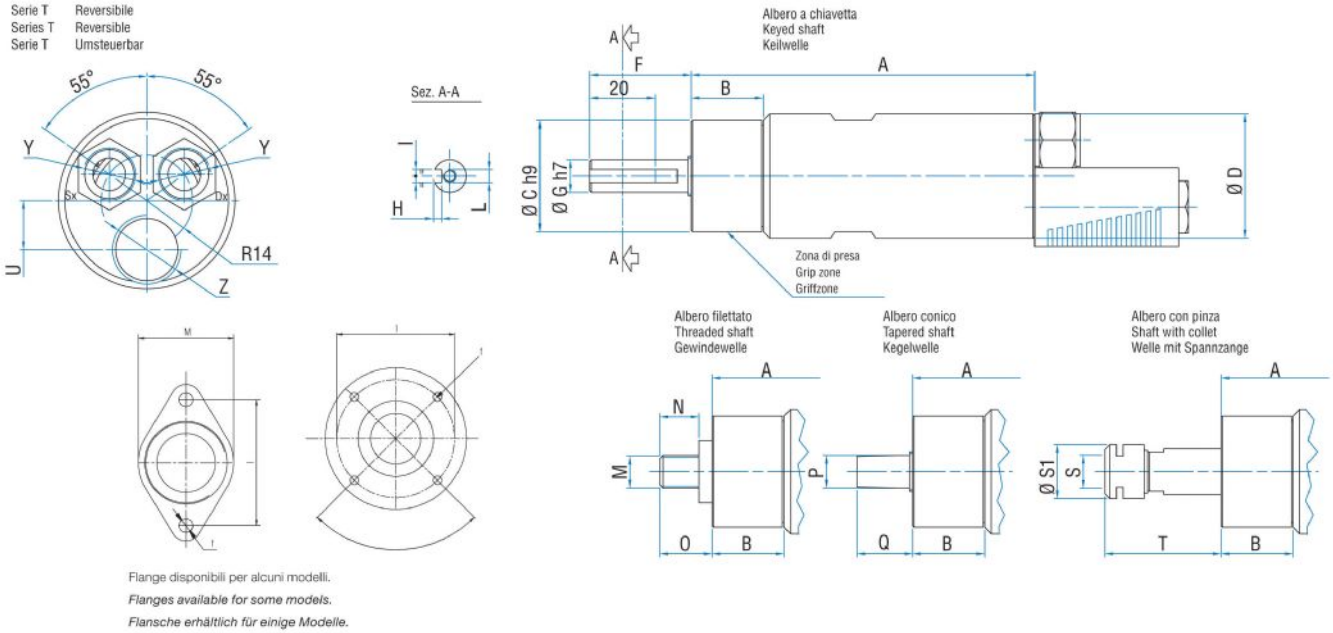

Flange disponibili per alcuni modelli.

Flanges available for some models.

Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q
T04R	8731207	199,5	31,5	48	54	31,5	14	3	5	M6	1/2"x20UNF	16,5	21,5	B12	26