MOTORS WITH POWER UP TO 850 W

T SERIES - Reversible

WATT: 740 / CONSUMPTION: 1100 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 12 mm

Data sheet

T15R



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust


Technical specification


- Model	T15R
- Code	8731204
Speed rpm - No-load	1600
Speed rpm - at Max Power	820
Torque Nm - at Max Power	8,5
Torque Nm - Stall Torque	13

Form features

The normal delivery condition:
cylindrical shaft and body as shown in the photo.
Optional:
Shaft
- threaded - indication /AF (left rotation excluded - subject to checks for reversible)
- conical - indication /AC
- with collets - indication / AP

Characteristic curves

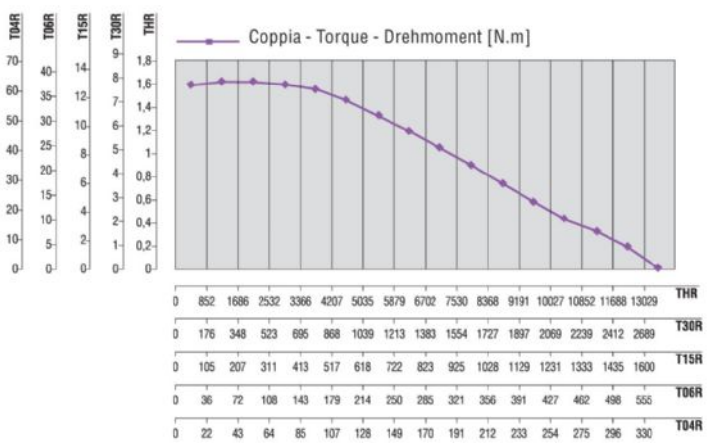

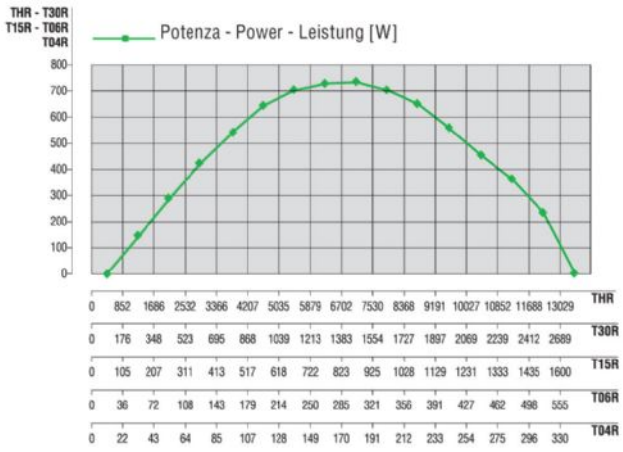

MOTORS WITH POWER UP TO 850 W

T SERIES - Reversible

WATT: 740 / CONSUMPTION: 1100 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 12 mm


Data sheet

T15R

Permissible radial and axial loads

Model	Code	Fr (N)	Fa (N)	Co (N)
T15R	8731204	2050	2350	4750

Overall dimensions

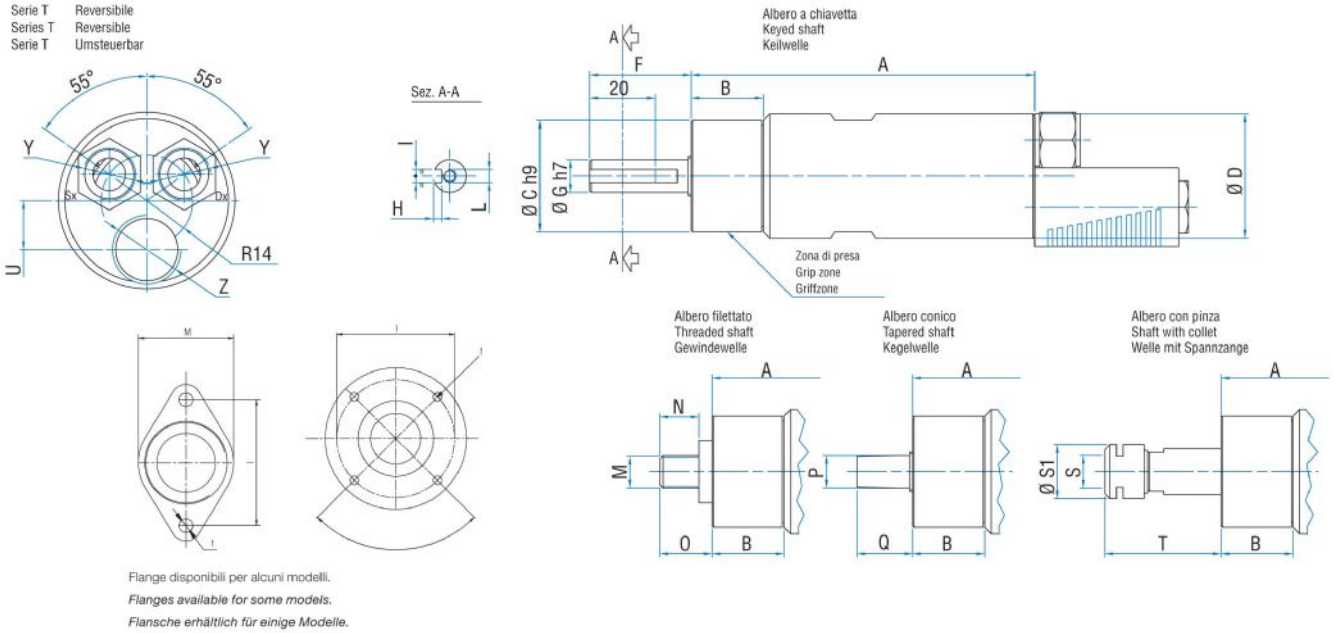

Flange disponibili per alcuni modelli.

Flanges available for some models.

Flansche erhältlich für einige Modelle.

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q
T15R	8731204	199,5	31,5	48	54	31,5	14	3	5	M6	1/2"x20UNF	16,5	21,5	B12	26