# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH


ALGS ACCU-TRK SERIES - Non reversible

WATT: 430 / CONSUMPTION: 600 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm (*) With platinum springs and optional cams (**) Optional on ATE version: direct starting for right and reversible motors.

Data sheet

**ALGS5D ATE (**)**

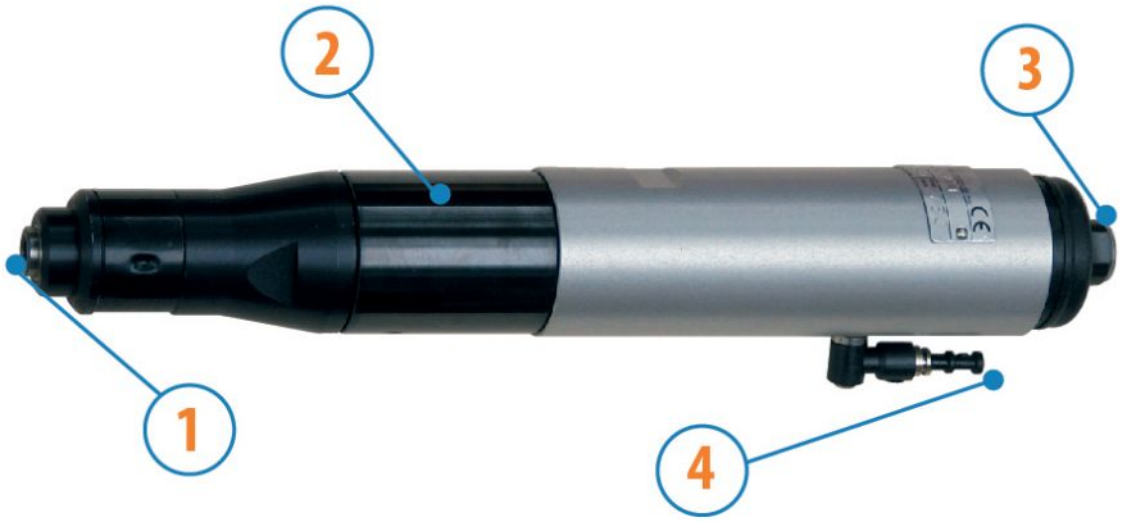


1. 1/4" hexagonal bit holder
2. Grip zone
3. Compressed air inlet
4. Screwing completed signal

## Technical specification

| | |
|---|---|
| Right rotation - Model | ALGS5D ATE (**) |
| Right rotation - Code | 8604246 |
| No-load speed - rpm/min | 450 |
| Torque Nm - Nm | 4,8 - 14,6 |
| Clutch spring | Gold |

## Form features

Standard coupling bit holder 1⁄4“ (6.35 mm)

# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH


Data sheet
**ALGS5D ATE (**)**

ALGS ACCU-TRK SERIES - Non reversible


WATT: 430 / CONSUMPTION: 600 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm (*) With platinum springs and optional cams (**) Optional on ATE version: direct starting for right and reversible motors.

## Torque Adjustment

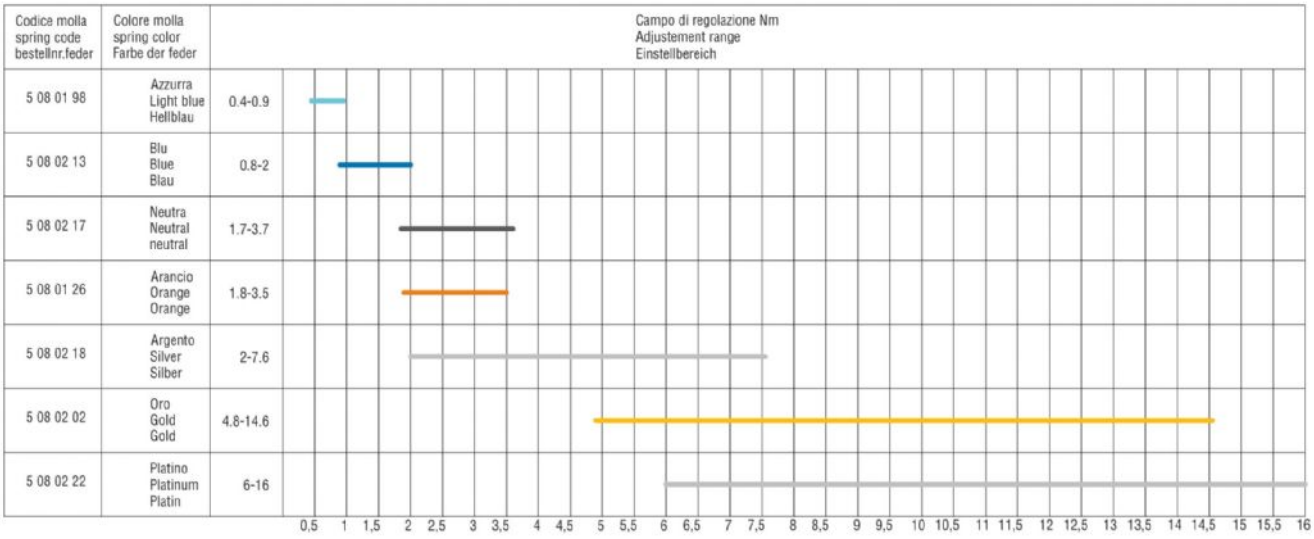


## Overall dimensions

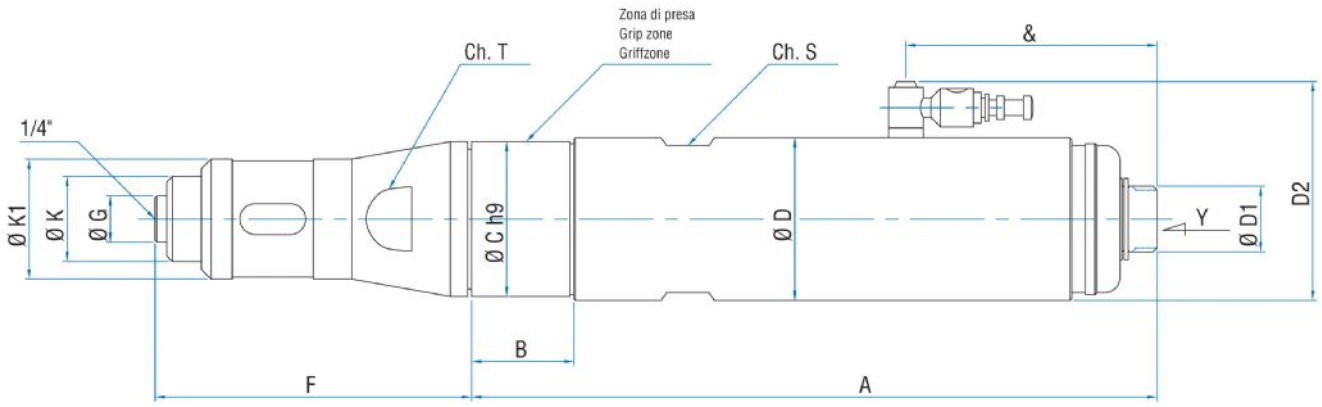

# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
**ALGS5D ATE (**)**

ALGS ACCU-TRK SERIES - Non reversible

WATT: 430 / CONSUMPTION: 600 Nl/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm (*) With platinum springs and optional cams (**) Optional on ATE version: direct starting for right and reversible motors.

| Model | Code | A | B | C | D | D1 | D2 | F | G | K | K1 | S | T | Y | & |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ALGS5D ATE (**) | 8604246 | 202,5 | 51,5 | 40 | 42 | 17 | 56 | 82 | 12 | 22 | 31 | 38 | 32 | 1/4" | 65 |