

## MOTORS FOR SCREWDRIVING APPLICATIONS WITH SLIP-TRK CLUTCH

SALGS FR SERIES - Non-reversible

WATT: 480 / CONSUMPTION: 870 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Data sheet  
**SALGS3D FR**



- 1. 1/4" hexagonal bit holder connection
- 2. Grip zone
- 3. Air inlet
- 4. Air exhaust

### Technical specification

|                         |            |
|-------------------------|------------|
| Right rotation - Model  | SALGS3D FR |
| Right rotation - Code   | 8604303    |
| No-load speed - rpm/min | 800        |
| Torque Nm - Nm          | 22,8       |
| Screws tightening       | M6-M8      |
| Clutch spring           | Neutral    |
| Clutch unit             | 7311143    |

### Form features


Allow the tightening torque to be adjusted through a friction clutch. Output shaft with axial sliding (3 mm), on request without scrolling. Standard bit holder coupling 1/4" (6.35 mm).

MOTORS FOR SCREWDRIVING  
APPLICATIONS WITH SLIP-TRK CLUTCH

Data sheet  
SALGS3D FR

SALGS FR SERIES - Non-reversible  
WATT: 480 / CONSUMPTION: 870 NI/1'  
Data measured at pressure of 6 bar - Minimum supply hose diameter: 10 mm

Overall dimensions

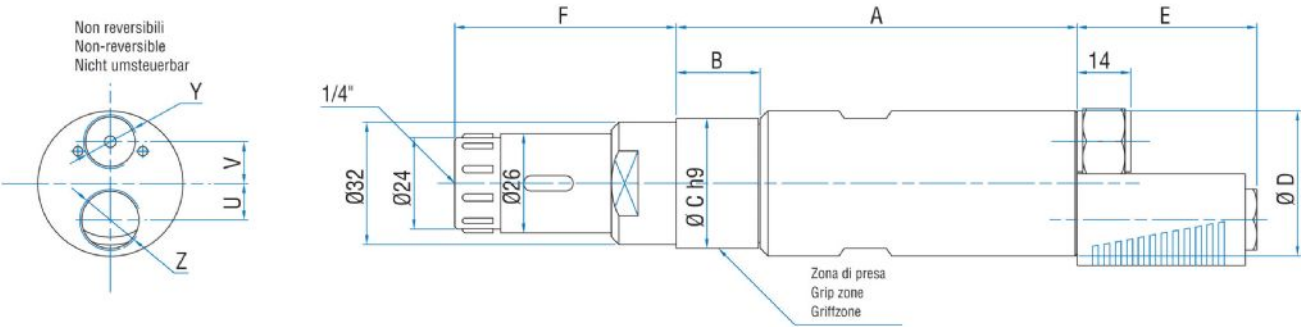

| Model         | Code    | A     | B    | C  | D  | E  | F    | U  | V  | Y    | Z    |
|---------------|---------|-------|------|----|----|----|------|----|----|------|------|
| SALGS3D<br>FR | 8604303 | 168,5 | 51,5 | 40 | 42 | 47 | 56,9 | 11 | 13 | 1/4" | 3/8" |