


## AUTOMATIC SCREWDRIVING MODULAR SYSTEM "SAMOA"

SCREWDRIVERS WITH FIXED AUTOMATIC FEED - thrust and return  
with coaxial piston

## Data sheet UAM A2P SCREW GUIDE HEAD WITH PISTON MOVEMENT

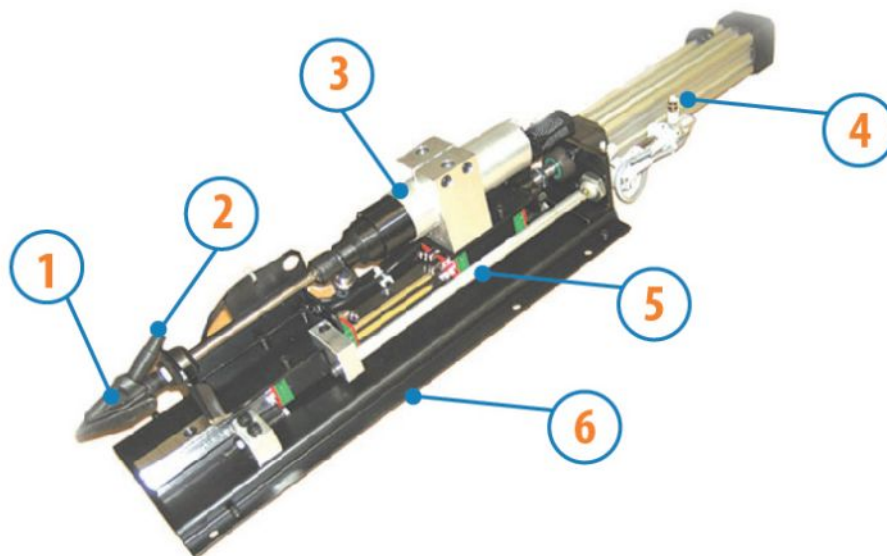

1. Head screw guide
2. Screws supply pipe
3. Engine
4. Engine piston
5. Piston for moving the head
6. UAM Base

### Technical specification

Dimensions of the screws that can be fed with the normal standard equipment (mm)

#### CIAPPETT

|         |           |         |         |         |         |
|---------|-----------|---------|---------|---------|---------|
| Ø testa | 3,5 - 4,2 | 4 - 5,2 | 5 - 6,5 | 6 - 7,2 | 7 - 8,2 |
| Length  | 8 - 25    | 10 - 25 | 12 - 25 | 14 - 25 | 16 - 25 |

#### COMPAT

|        |         |         |         |         |         |
|--------|---------|---------|---------|---------|---------|
| Ø      | 4 - 5,2 | 5 - 6,5 | 6 - 7,2 | 7 - 8,2 | 8 - 9,2 |
| Length | 10 - 25 | 12 - 25 | 14 - 25 | 16 - 25 | 18 - 25 |

#### TUBO

|         |         |         |
|---------|---------|---------|
| Ø testa | 6 - 7,2 | 7 - 8,2 |
| Length  | 14 - 35 | 16 - 35 |

#### MAXI

|         |         |         |         |         |          |           |             |           |
|---------|---------|---------|---------|---------|----------|-----------|-------------|-----------|
| Ø testa | 5 - 6,5 | 6 - 7,2 | 7 - 8,2 | 8 - 9,2 | 9 - 10,4 | 10 - 11,4 | 10,5 - 12,5 | 12 - 13,5 |
| Length  | 12 - 52 | 14 - 52 | 16 - 52 | 18 - 52 | 20 - 52  | 22 - 52   | 24 - 52     | 26 - 52   |