


## Drilling unit

TFLF series - Pneumatic thrust and return

Chuck connection : 3/8" x 24

Data sheet

**TFLF2**

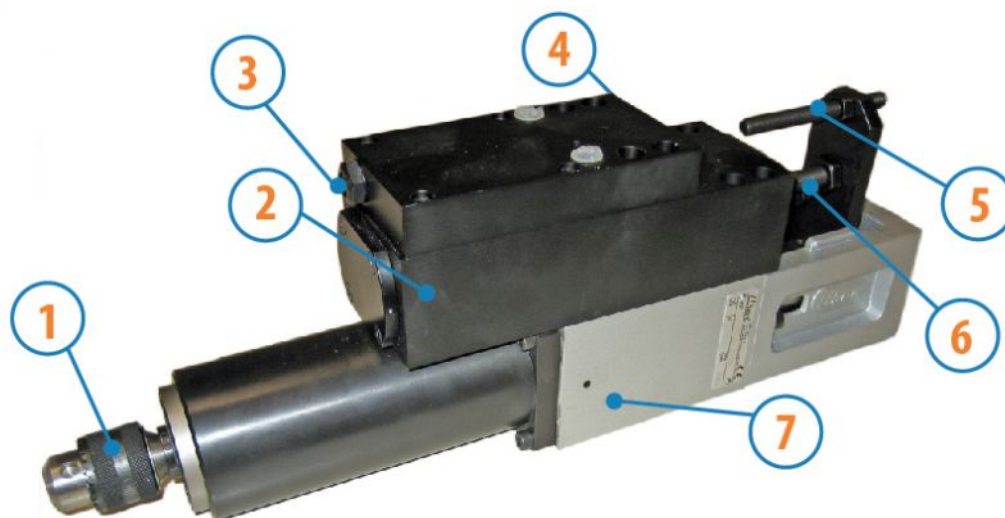

1. Chuck
2. Hydraulic brake
3. Braked stroke speed adjustment screw
4. Micro switching of the return unit
5. Stroke inversion micro switch adjustment
6. Braked stroke speed adjustment
7. Unit body

### Technical specification

|                                  |          |
|----------------------------------|----------|
| Model                            | TFLF2    |
| Code                             | 8602322  |
| No-load speed - rpm/min          | 1200     |
| Drilling capacity mm - Wood      | 13       |
| Drilling capacity mm - Aluminium | 9        |
| Drilling capacity mm - Steel     | 7        |
| Total stroke - mm                | 100      |
| Braked stroke - mm               | 50       |
| Feed thrust at 6 bar - Kg        | 70       |
| Power - Watt                     | 160      |
| Power - HP                       | 0,22     |
| Weight - Kg                      | 8        |
| Air consumption - NI/cycle       | 500      |
| Air                              | 1/4' GAS |
| Hose - ø min                     | 6        |
| Standard chuck - Code            | 3715814  |