


## MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

ALCYO ACCU-TRK SERIES - Non reversible

WATT: 110 / CONSUMPTION: 340 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 5 mm (\*) Optional on ATE version: direct starting for Right and reversible motors.

Data sheet  
ALCYO44 AT

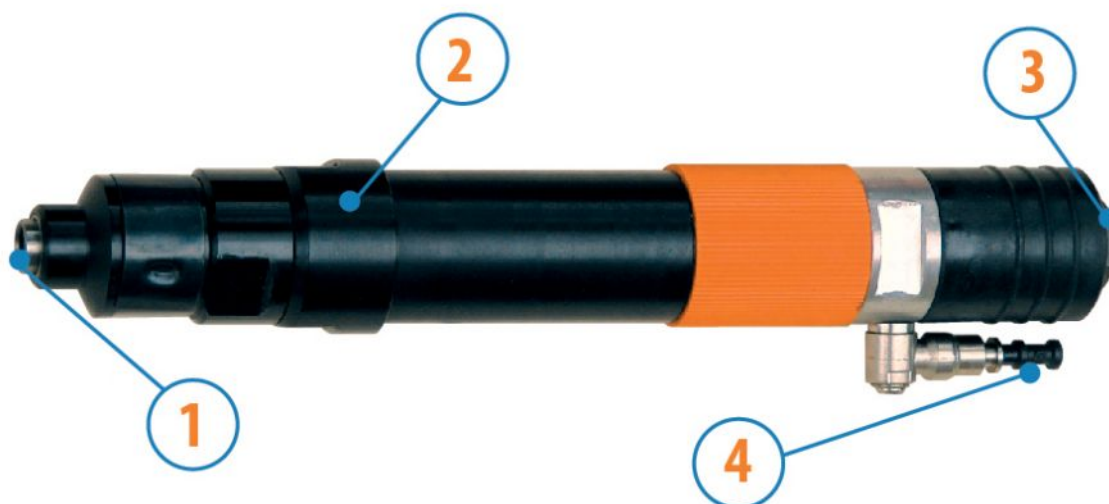

1. 1/4" hexagonal bit holder
2. Grip zone
3. Compressed air inlet
4. Screwing completed signal

### Technical specification

Right rotation - Model	ALCYO44 AT
Right rotation - Code	8604274
No-load speed - rpm/min	800
Torque Nm - Nm	1,7 - 3,0
Clutch spring	Neutral

### Form features

Standard coupling bit holder 1/4" (6.35 mm)

# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet  
**ALCYO44 AT**

ALCYO ACCU-TRK SERIES - Non reversible

WATT: 110 / CONSUMPTION: 340 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 5 mm (\*) Optional on ATE version: direct starting for Right and reversible motors.

## Torque Adjustment

