
MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
ALFB22R ATE

ALFB ACCU-TRK SERIES - Reversible

WATT: 190 / CONSUMPTION: 480 Nl/1"

The left rotation is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

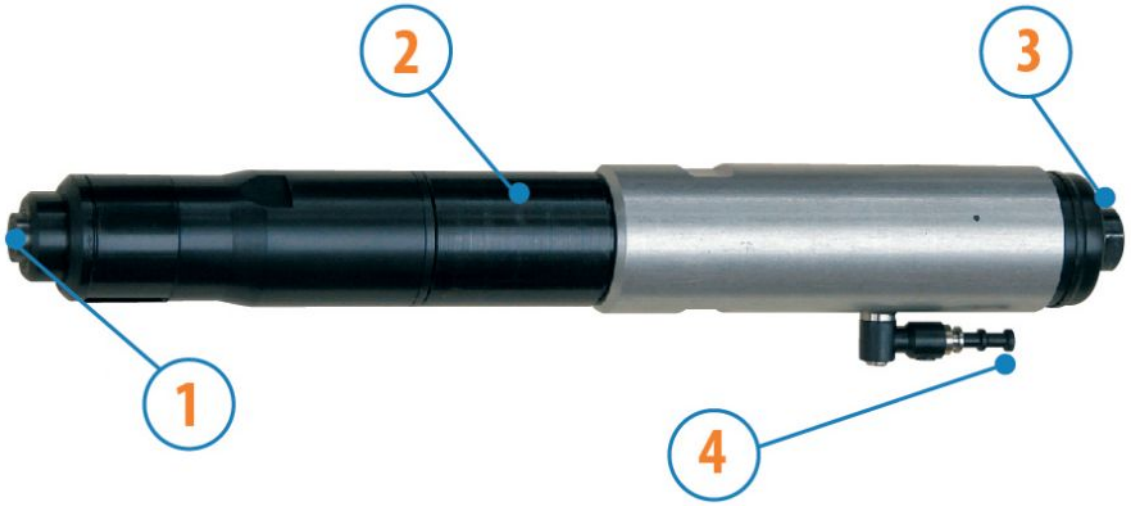

1. 1/4" hexagonal bit holder
2. Grip zone
3. Compressed air inlet
4. Screwing completed signal

Technical specification

Reversible - Model	ALFB22R ATE
Reversible - Code	8604280
No-load speed - rpm/min	900
Torque Nm - Nm	1,8 - 3,5
Clutch spring	Orange

Form features

Standard coupling bit holder 1⁄4“ (6.35 mm)

Torque Adjustment


MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
ALFB22R ATE


ALFB ACCU-TRK SERIES - Reversible

WATT: 190 / CONSUMPTION: 480 Nl/1"

The left rotation is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

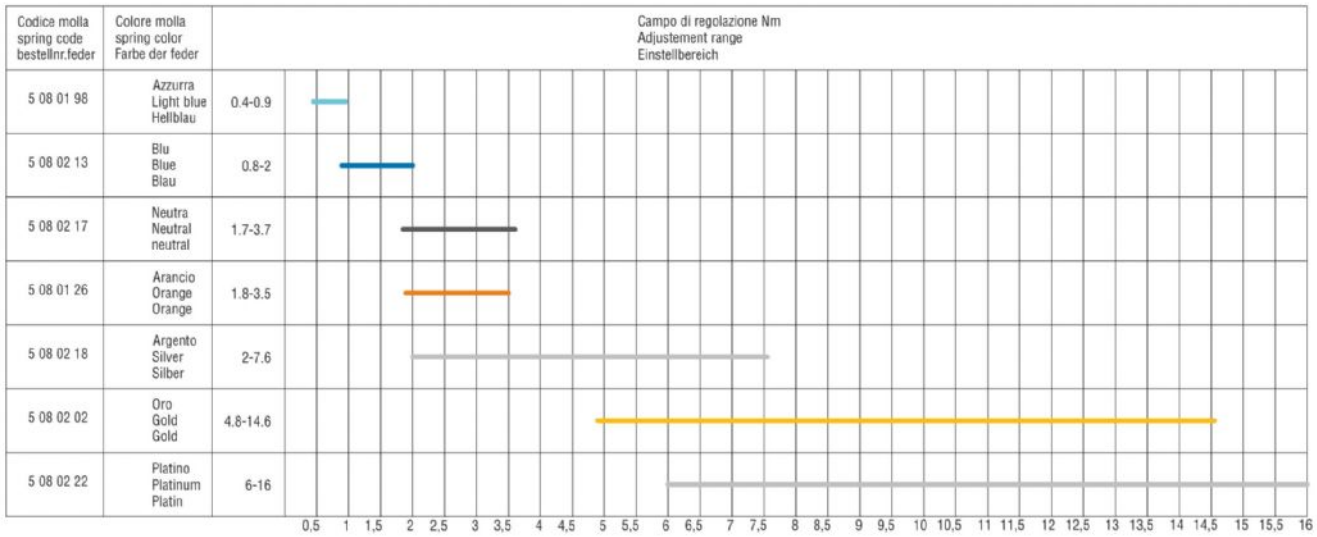

Overall dimensions

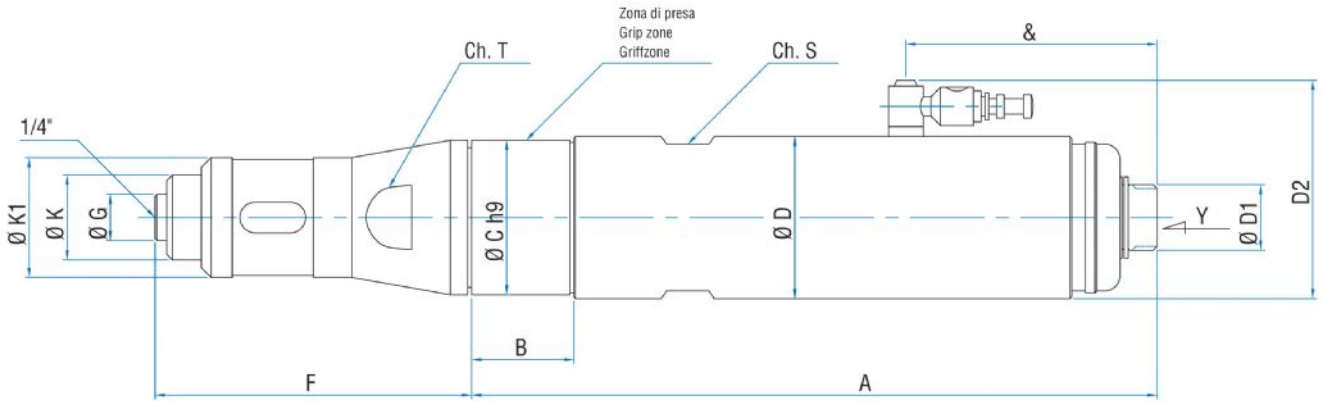

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
ALFB22R ATE

ALFB ACCU-TRK SERIES - Reversible

WATT: 190 / CONSUMPTION: 480 Nl/1"

The left rotation is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

Model	Code	A	B	C	D	D1	D2	F	G	K	K1	S	T	Y	&
ALFB22R ATE	8604280	169,7	27,7	34	38	17	52,5	100	12	22	31	34	32	1/4"	65