


MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

ALGS ACCU-TRK SERIES - Non reversible

WATT: 430 / CONSUMPTION: 600 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm (*) With platinum springs and optional cams (**) Optional on ATE version: direct starting for right and reversible motors.

Data sheet
ALGS5D ATE ()**

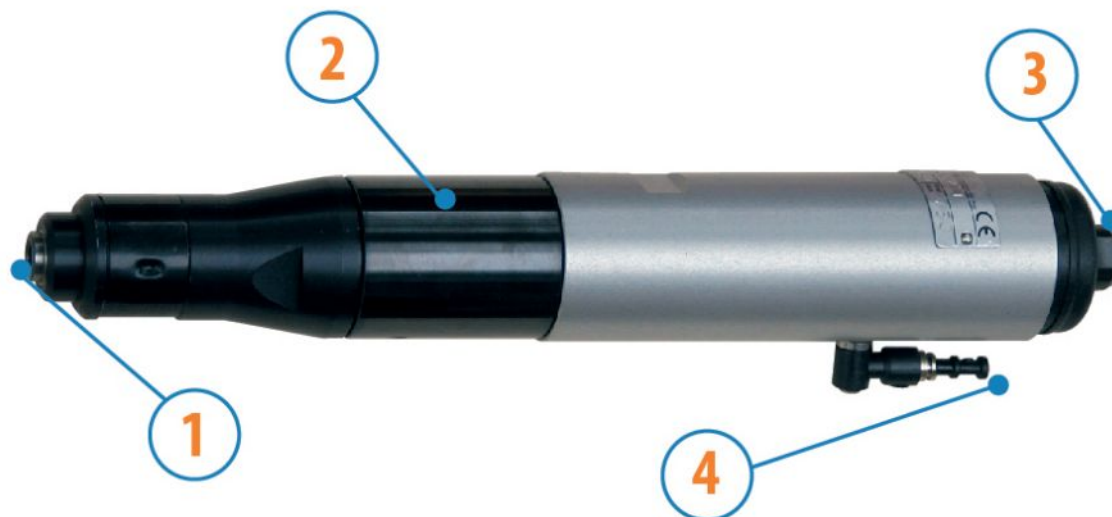

- 1. 1/4" hexagonal bit holder
- 2. Grip zone
- 3. Compressed air inlet
- 4. Screwing completed signal

Technical specification

Right rotation - Model	ALGS5D ATE (**)
Right rotation - Code	8604246
No-load speed - rpm/min	450
Torque Nm - Nm	4,8 - 14,6
Clutch spring	Gold

Form features

Standard coupling bit holder 1/4" (6.35 mm)

MOTORS FOR SCREW DRIVING
APPLICATIONS WITH ACCU-TRK CLUTCH


Data sheet
ALGS5D ATE (**)

ALGS ACCU-TRK SERIES - Non reversible


WATT: 430 / CONSUMPTION: 600 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm (*) With platinum springs and optional cams (**) Optional on ATE version: direct starting for right and reversible motors.

Torque Adjustment

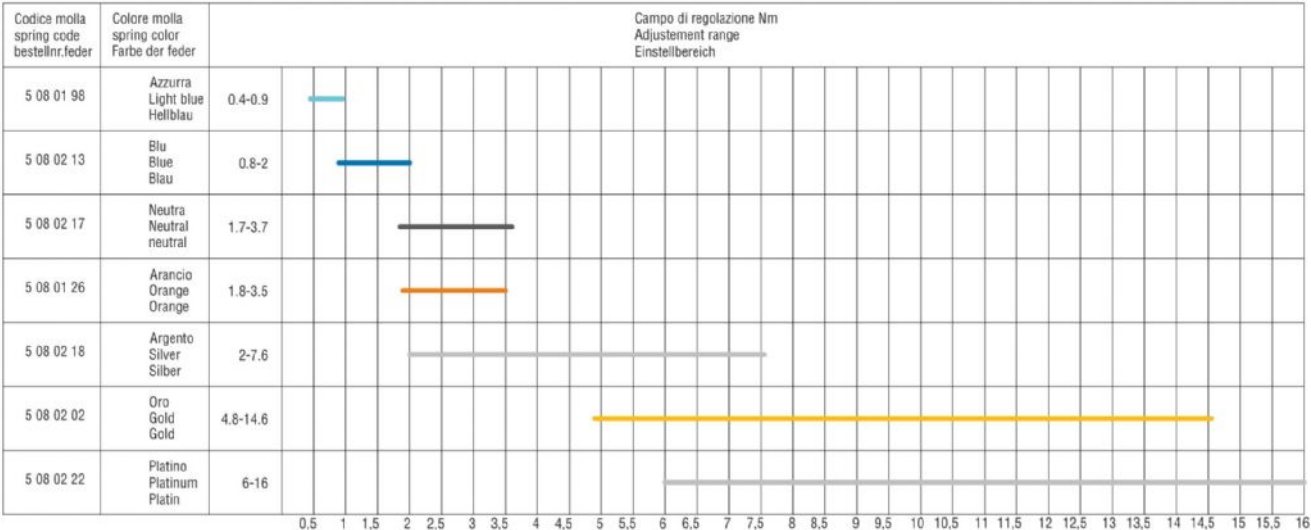

Overall dimensions

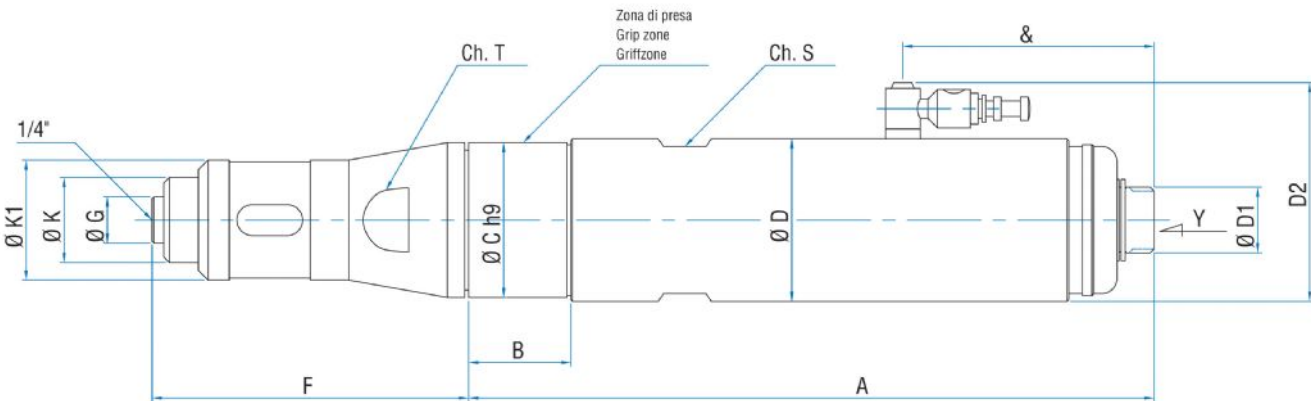

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

ALGS ACCU-TRK SERIES - Non reversible

WATT: 430 / CONSUMPTION: 600 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8

mm (*) With platinum springs and optional cams (**) Optional on ATE

version: direct starting for right and reversible motors.

Data sheet
ALGS5D ATE ()**

Model	Code	A	B	C	D	D1	D2	F	G	K	K1	S	T	Y	&
ALGS5D ATE (**)	8604246	202,5	51,5	40	42	17	56	82	12	22	31	38	32	1/4"	65