
# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
**ALGS5R ATE**

ALGS ACCU-TRK SERIES - Reversible

WATT: 430 / CONSUMPTION: 600 Nl/1"

The left rotation is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

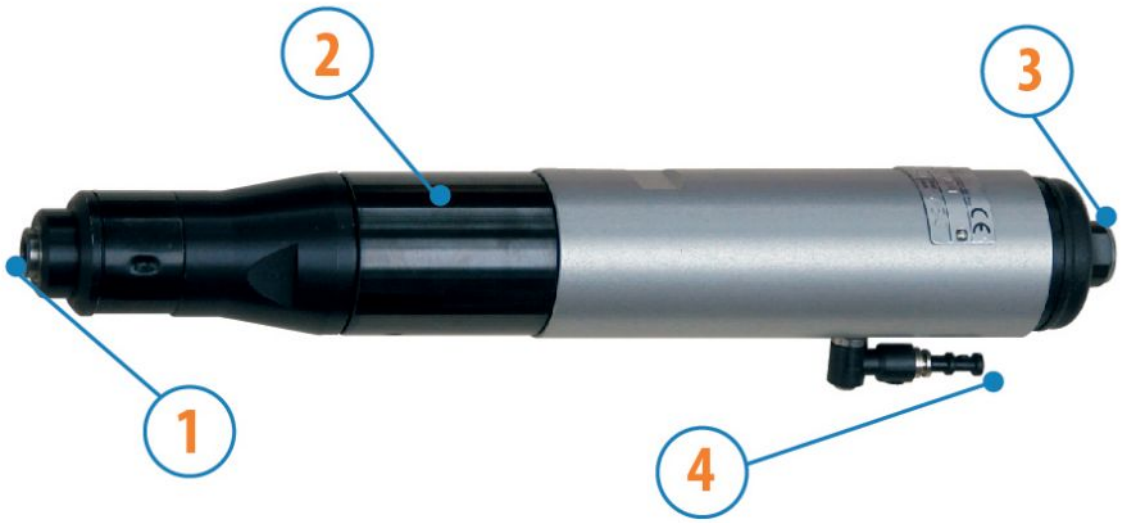


1. 1/4" hexagonal bit holder
2. Grip zone
3. Compressed air inlet
4. Screwing completed signal

## Technical specification

| | |
|---|---|
| Reversible - Model | ALGS5R ATE |
| Reversible - Code | 8604286 |
| No-load speed - rpm/min | 500 |
| Torque Nm - Nm | 4,8 - 14,6 |
| Clutch spring | Gold |

## Form features

Standard coupling bit holder 1⁄4“ (6.35 mm)

## Torque Adjustment


# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
**ALGS5R ATE**


ALGS ACCU-TRK SERIES - Reversible

WATT: 430 / CONSUMPTION: 600 Nl/1"

The left rotation is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

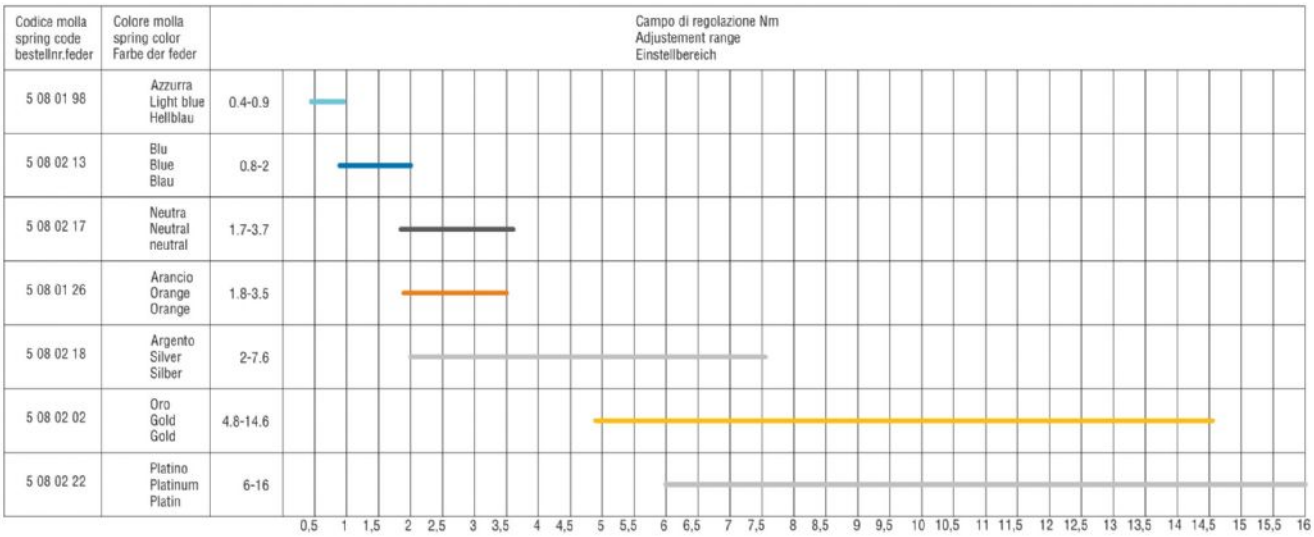


## Overall dimensions

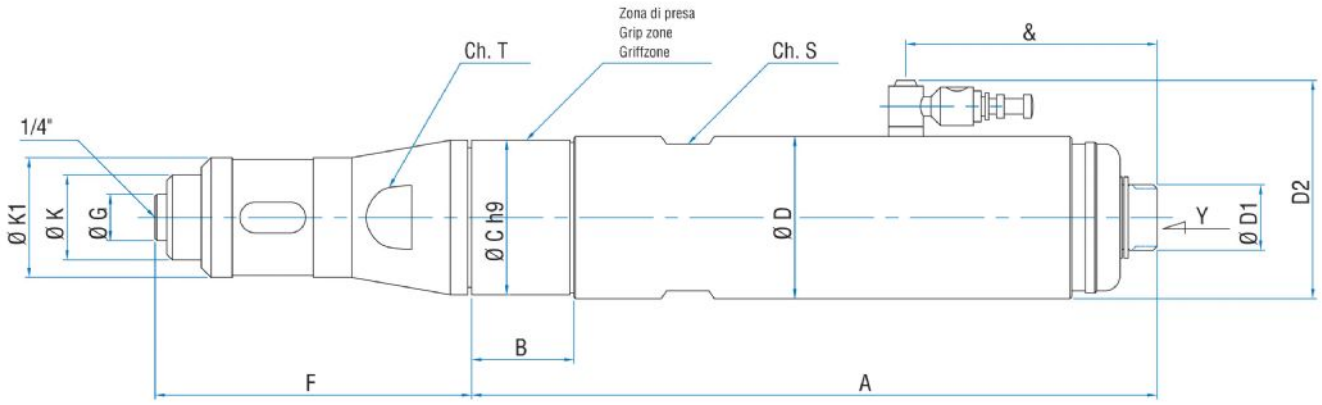

# MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
**ALGS5R ATE**

ALGS ACCU-TRK SERIES - Reversible

WATT: 430 / CONSUMPTION: 600 Nl/1"

The left rotation is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

| Model | Code | A | B | C | D | D1 | D2 | F | G | K | K1 | S | T | Y | & |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ALGS5R ATE | 8604286 | 202,5 | 51,5 | 40 | 42 | 17 | 56 | 82 | 12 | 22 | 31 | 38 | 32 | 1/4" | 65 |