

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

LACS ACCU-TRK SERIES - Non-reversible

WATT: 430 / CONSUMPTION: 600 NI/1"

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm
On ATE version: direct starting for Right and reversible motors.

Data sheet
LACS35D ATE



1. Square axial connection for plug sockets
2. Stroke compensator
3. Screwing completed signal
4. Air inlet

Technical specification

Reversible - Model	LACS35D ATE
Reversible - Code	8604121
No-load speed - rpm/min	190
Torque Nm - Nm	20-35
Clutch spring	Silver
Bush holder	1/2" (3/8")

Form features

- Sliding axial coupling with stroke compensator.
1/4 Panel bit holder for socket bushes
Available versions:
- Rigid shaft (without axial stroke compensation)
 - Short shaft
 - Short rigid shaft (without axial stroke compensation).

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH


Data sheet
LACS35D ATE

LACS ACCU-TRK SERIES - Non-reversible


WATT: 430 / CONSUMPTION: 600 NI/1"

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm
On ATE version: direct starting for Right and reversible motors.

Torque Adjustment

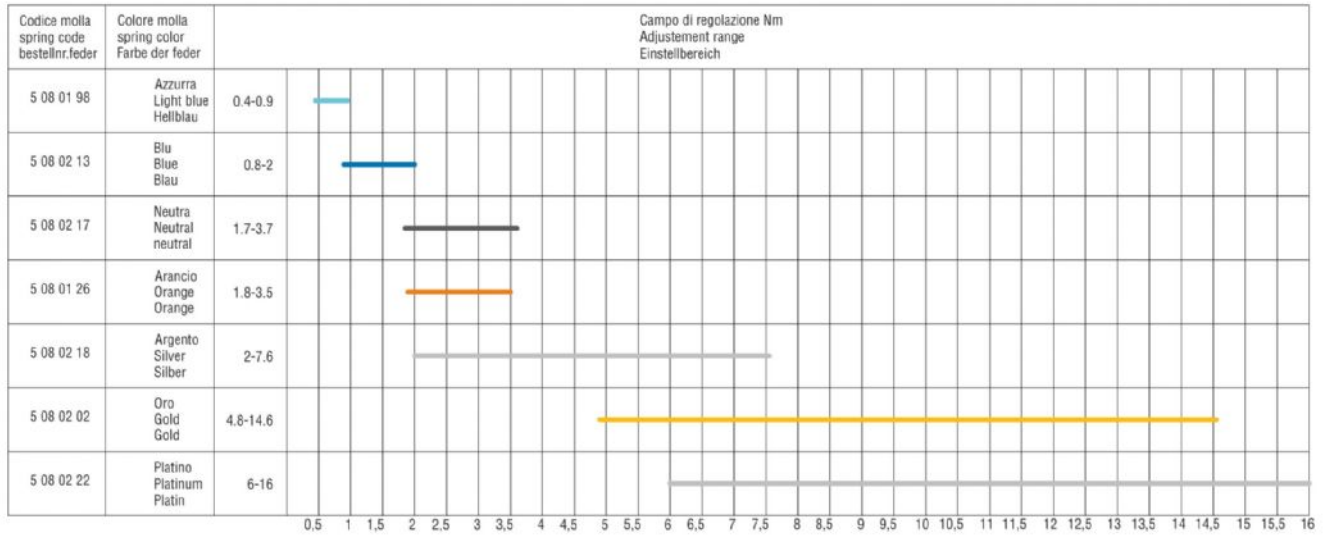

Overall dimensions

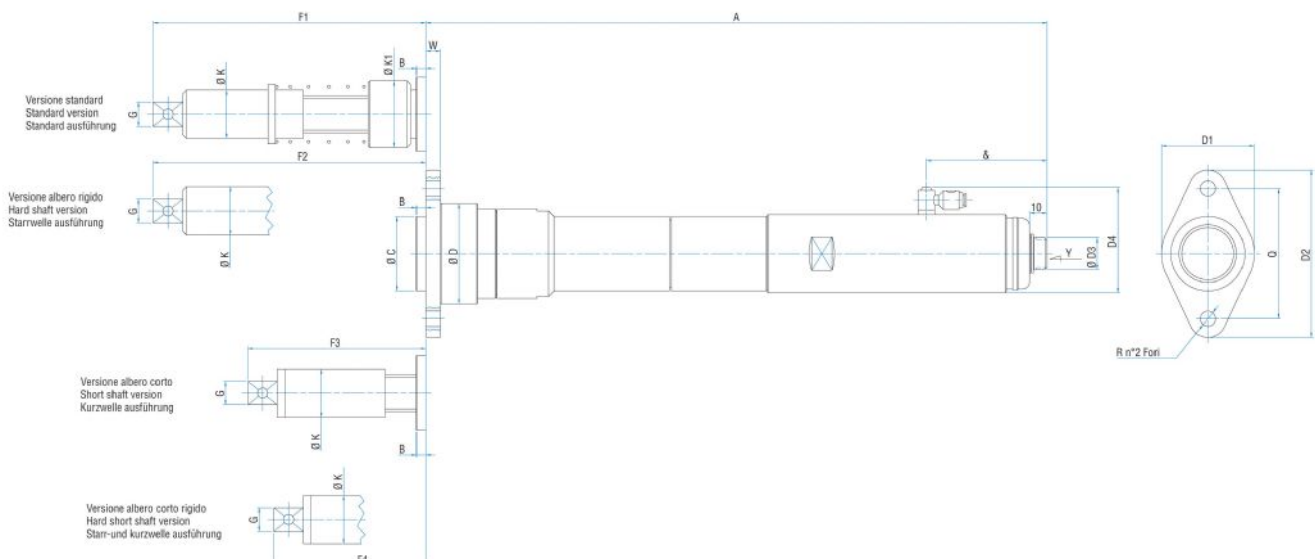

MOTORS FOR SCREW DRIVING
APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
LACS35D ATE

LACS ACCU-TRK SERIES - Non-reversible

WATT: 430 / CONSUMPTION: 600 NI/1"

Data measured at pressure of 6 bar - Minimum supply hose diameter: 8 mm
On ATE version: direct starting for Right and reversible motors.

Model	Code	A	B	C	D	D1	D2	D3	D4	F1	F2	F3	F4	G
LACS35D ATE	8604121	295,5	5	40	48	50	90	17	56,5	148	114	82	68	1/2"(3/8")