

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

SALGS ACCU-TRK SERIES - Non-reversible

WATT: 480 / CONSUMPTION: 870 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10

mm * = With platinum springs and optional cams (**) Optional on ATE

version: direct starting for Right and reversible motors.

Data sheet
SALGS5D ATE ()**



- 1. 1/4" hexagonal bit holder
- 2. Grip zone
- 3. Compressed air inlet
- 4. Screwing completed signal

Technical specification

Right rotation - Model	SALGS5D ATE (**)
Right rotation - Code	8604344
No-load speed - rpm/min	400
Torque Nm - Nm	4,8 - 14,6 (20)*
Clutch spring	Gold

Form features

Standard coupling bit holder 1/4" (6.35 mm)

MOTORS FOR SCREW DRIVING
APPLICATIONS WITH ACCU-TRK CLUTCH

SALGS ACCU-TRK SERIES - Non-reversible

WATT: 480 / CONSUMPTION: 870 NI/1'


Data measured at pressure of 6 bar - Minimum supply hose diameter: 10

mm * = With platinum springs and optional cams (**) Optional on ATE


version: direct starting for Right and reversible motors.

Torque Adjustment

Data sheet
SALGS5D ATE (**)

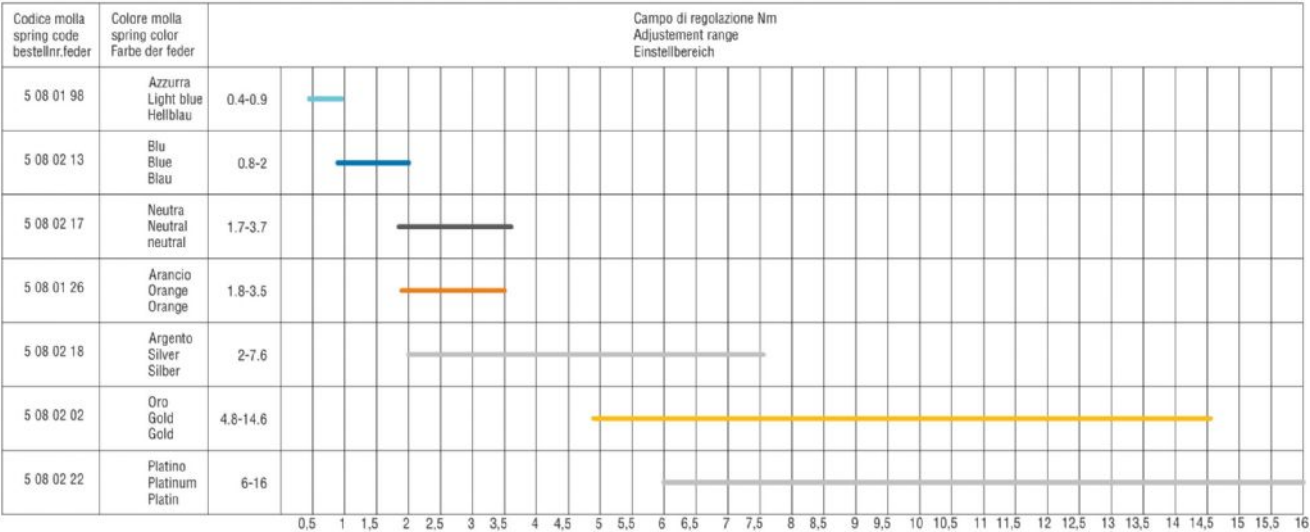

Overall dimensions

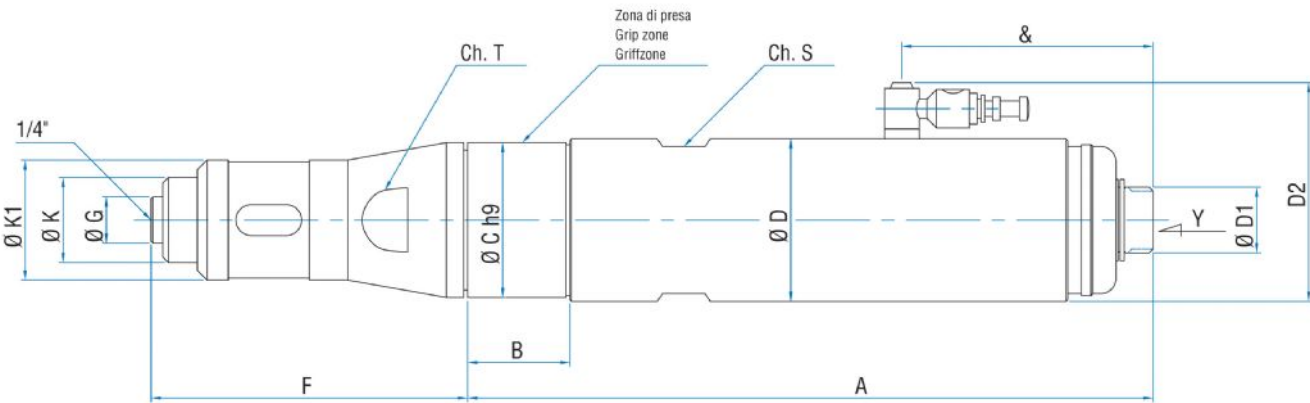

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

SALGS ACCU-TRK SERIES - Non-reversible

WATT: 480 / CONSUMPTION: 870 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 10

mm * = With platinum springs and optional cams (**) Optional on ATE

version: direct starting for Right and reversible motors.

Model	Code	A	B	C	D	D1	D2	F	G	K	K1	S	T	Y	&
SALGS5D ATE (**)	8604344	227,5	51,5	40	42	17	56,5	82	12	22	31	38	32	1/4"	65

Data sheet
SALGS5D ATE ()**