


MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

SALGS ACCU-TRK SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 NI/1'

Note: the left rotation torque is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

Data sheet
SALGS7R ATE

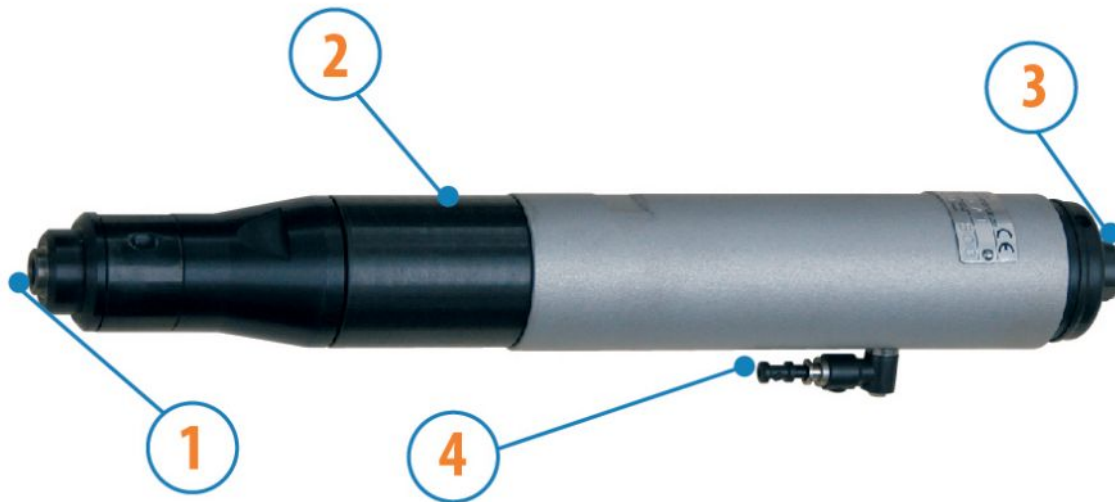

1. 1/4" hexagonal bit holder
2. Grip zone
3. Compressed air inlet
4. Screwing completed signal

Technical specification

| | |
|-------------------------|-------------|
| Reversible - Model | SALGS7R ATE |
| Reversible - Code | 8604335 |
| No-load speed - rpm/min | 300 |
| Torque Nm - Nm | 4,8 - 14,6 |
| Clutch spring | Gold |

Form features

Standard coupling bit holder 1/4" (6.35 mm)

Torque Adjustment


MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
SALGS7R ATE


SALGS ACCU-TRK SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 NI/1'

Note: the left rotation torque is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

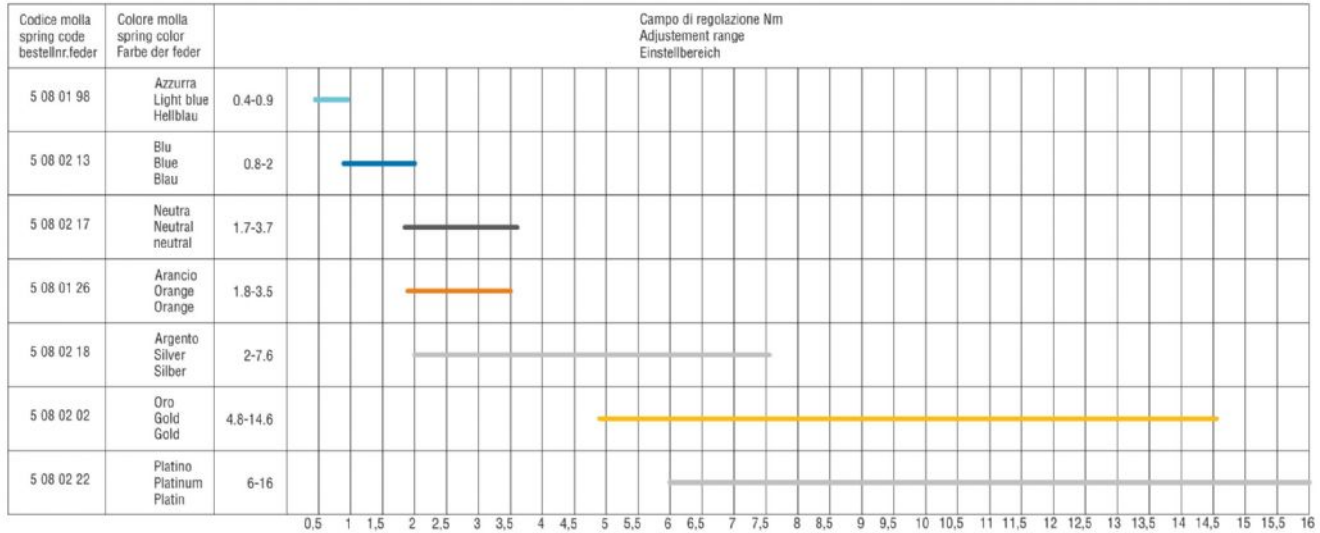

Overall dimensions

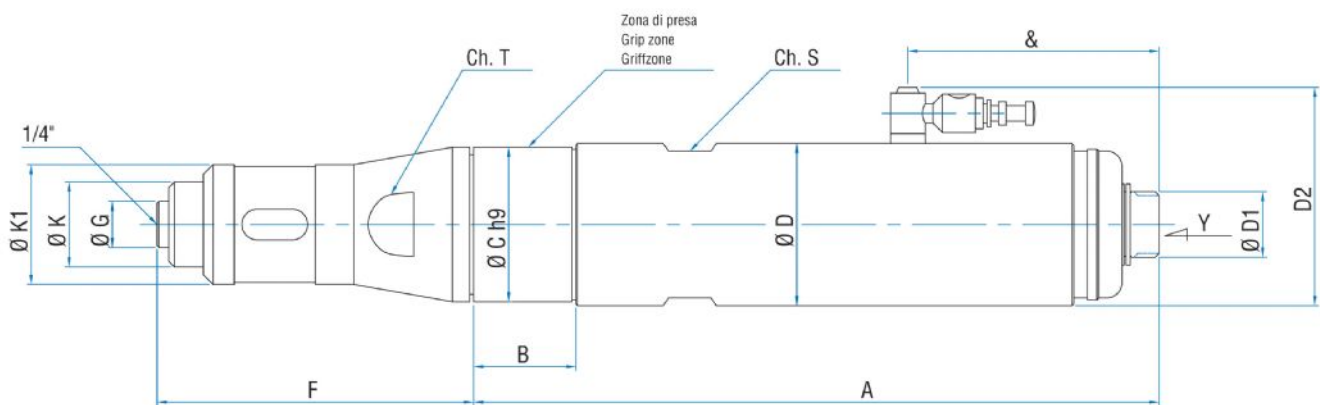

MOTORS FOR SCREW DRIVING
APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
SALGS7R ATE

SALGS ACCU-TRK SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 NI/1'

Note: the left rotation torque is not controlled by the friction clutch. On

ATE version: direct starting for Right and reversible motors.

| Model | Code | A | B | C | D | D1 | D2 | F | G | K | K1 | S | T | Y | & |
|----------------|---------|-------|------|----|----|----|------|----|----|----|----|----|----|------|----|
| SALGS7R ATE | 8604335 | 227,5 | 51,5 | 40 | 42 | 17 | 56,5 | 82 | 12 | 22 | 31 | 38 | 32 | 1/4" | 65 |