MOTORS FOR TAPPING MG-MP-MTR SERIES

MP SERIES - Reversible

WATT: 600 / CONSUMPTION: 800 Nl/1'

The motor is equipped with a two-speed synchronized gear box. Data measured at pressure of 6 bar - Minimum supply hose diameter: 12 mm

Data sheet
MP100CA



1. Chuck
2. Command speed change
3. Grip zone
4. Air inlet

Technical specification

Reversible - Model	MP100CA
Reversible - Code	8305537
No-load speed - rpm/min	300/100
Torque Nm - Nm	180
Capacity tapping steel	M30
Chuck connection	B16
Chuck code	3731004
Weight - Kg	3,3

Form features

The normal delivery condition of the mod- els listed in the table is that with cylindrical body as shown in the photo, and coupling as indicated. Available on request for models from the MTR series and the MP 100 model, are the versions with reversal and command valves already applied to the input air.

REVERSING THE DIRECTION OF ROTATION WITH MOTOR REVERSAL+GEAR BOX

The motor is reversible and must be connected with a reversal valve. The control valve determines the direction of rotation with right for tapping, and left to unscrew.

The machine is equipped with a two-speed synchronized gear box, which allows the no-load speed to be changed from 300 to 100 revolutions/min, and thus obtain the conditions for ideal tapping for a broad range of threading diameters and/or materials to be threaded.

MOTORS FOR TAPPING MG-MP-MTR SERIES


MP SERIES - Reversible

WATT: 600 / CONSUMPTION: 800 Nl/1'

The motor is equipped with a two-speed synchronized gear box. Data measured at pressure of 6 bar - Minimum supply hose diameter: 12 mm

Data sheet
MP100CA

Overall dimensions

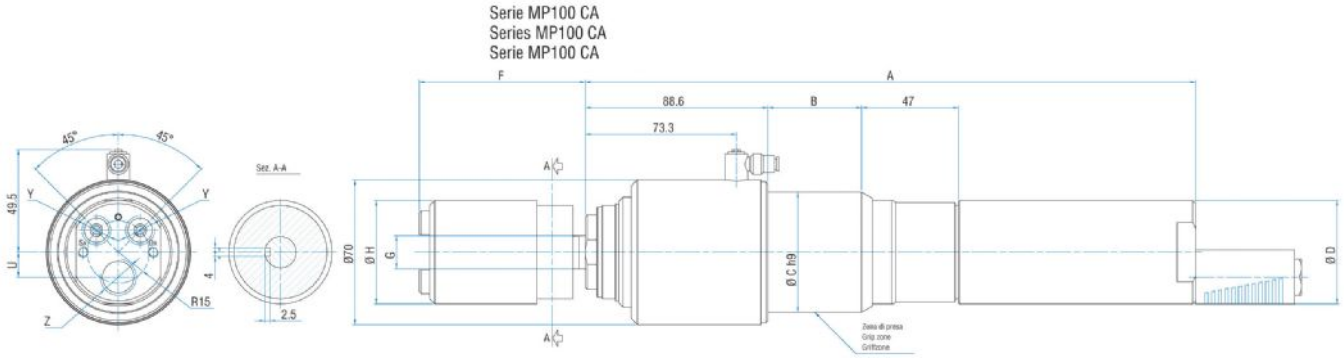

Model	Code	A	A1	B	C	D	D1	F	G	H	U	V	Y	Z
MP100CA	8305537	296	122,5	45,4	58	50	70	80,5	B16	50,8	12	/	1/4" GAS	3/8" GAS