
AUTOMATIC SCREWDRIVING MODULAR SYSTEM "SAMOA"

SCREWDRIVERS WITH FIXED AUTOMATIC FEED - thrust and return with coaxial piston

Data sheet

UAM A2P SCREW GUIDE HEAD WITH PISTON MOVEMENT

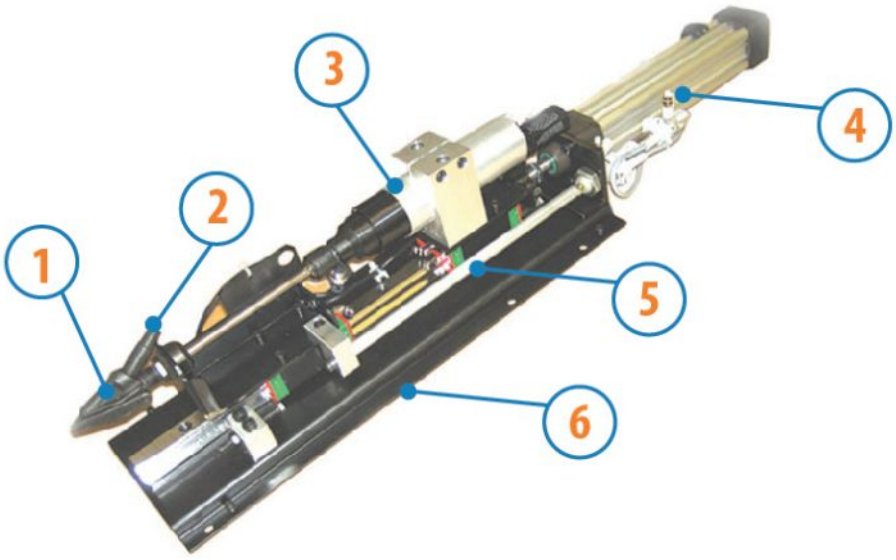

1. Head screw guide
2. Screws supply pipe
3. Engine
4. Engine piston
5. Piston for moving the head
6. UAM Base

Technical specification

Dimensions of the screws that can be fed with the normal standard equipment (mm)

CIAPPETT

Ø testa	3,5 - 4,2	4 - 5,2	5 - 6,5	6 - 7,2	7 - 8,2
Length	8 - 25	10 - 25	12 - 25	14 - 25	16 - 25

COMPAT

Ø	4 -5,2	5 - 6,5	6 - 7,2	7 - 8,2	8 - 9,2
Length	10 - 25	12 - 25	14 - 25	16 - 25	18 - 25

TUBO

Ø testa	6 - 7,2	7 - 8,2
Length	14 - 35	16 - 35

MAXI

Ø testa	5 - 6,5	6 - 7,2	7 - 8,2	8 - 9,2	9 - 10,4	10 - 11,4	10,5 - 12,5	12 - 13,5
Length	12 - 52	14 - 52	16 - 52	18 - 52	20 - 52	22 - 52	24 - 52	26 - 52