
# AUTOMATIC SCREWDRIVING MODULAR SYSTEM "SAMOA"

SELF THRUST SCREWDRIVERS (AUTOMATIC INTERNAL PUSH) - STRAIGHT - with SLIP-TRK clutch and lever start

Data sheet
**VITMATIC 2014 44Y**

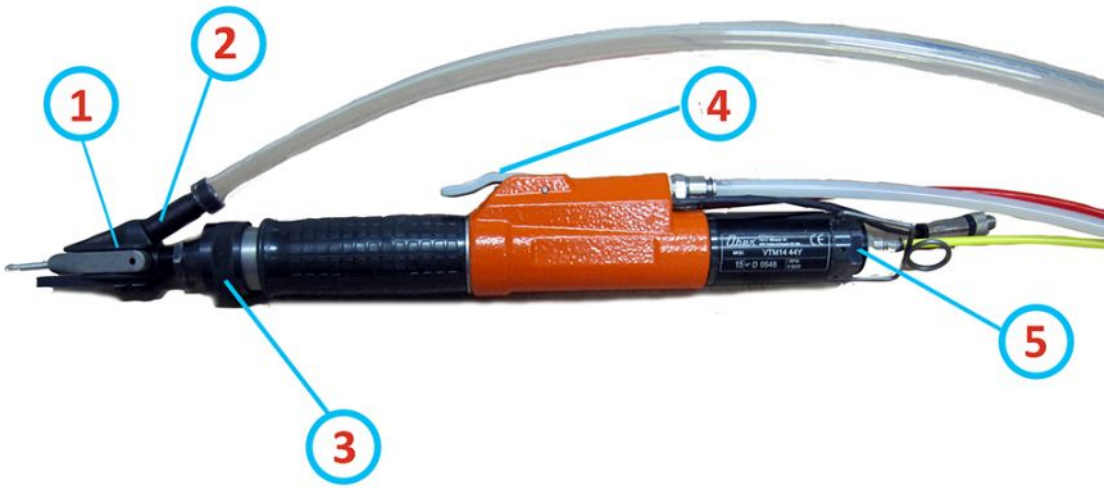


1. Head screw guide
2. Screws supply pipe
3. Head mounting ring Quick-release blade
4. Start lever
5. Piston for protruding screw option

## Technical specification

| | |
|---|---|
| Model | VITMATIC 2014 44Y |
| Code | 8306610 |
| No-load speed - rpm/min | 1000 |
| Max Torque - Nm | 2 |
| Power - Watt | 110 |
| Air consumption - Nl/cycle | 14 |
| Stroke - mm | 47 |
| Length - mm | 330 |

## Dimensions of the screws that can be fed with the normal standard equipment (mm)

CIAPPETT

| | | | | | |
|---|---|---|---|---|---|
| Ø testa | 3,5 - 4,2 | 4 - 5,2 | 5 - 6,5 | 6 - 7,2 | 7 - 8,2 |
| Length | 8 - 25 | 10 - 25 | 12 - 25 | 14 - 25 | 16 - 25 |

COMPAT

| | | | | |
|---|---|---|---|---|
| Ø testa | 4 -5,2 | 5 - 6,5 | 6 - 7,2 | 7 - 8,2 |
| Length | 10 - 25 | 12 - 25 | 14 - 25 | 16 - 25 |

TUBO

| | | |
|---|---|---|
| Ø testa | 6 - 7,2 | 7 - 8,2 |
| Length | 14 - 35 | 16 - 35 |

MAXI

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Ø testa | 5 - 6,5 | 6 - 7,2 | 7 - 8,2 | 8 - 9,2 | 9 - 10,4 | 10 - 11,4 | 10,5 - 12,5 | 12 - 13,5 |
| Length | 12 - 52 | 14 - 52 | 16 - 52 | 18 - 52 | 20 - 52 | 22 - 52 | 24 - 52 | 26 - 52 |