


## Drilling unit

TASG series - Pneumatic thrust and return

Chuck connection: B16 ER20 collet holder. Collets in sizes from 1 to 13 mm are available on request on all models. A 16 mm chuck is available on request on the models TASG5, TASG7 and TASG 8.

Data sheet  
**TASG2**

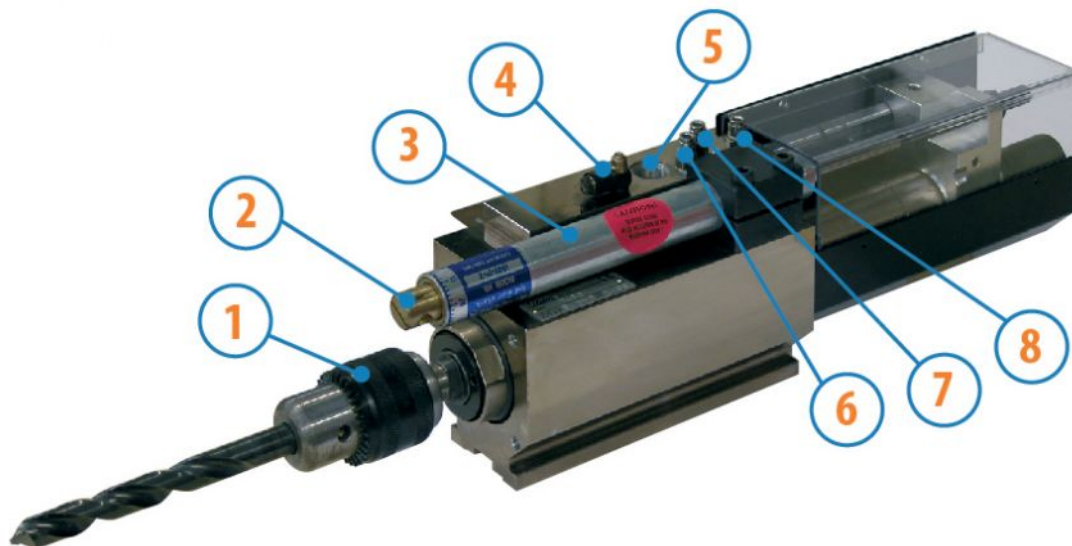

1. Chuck
2. Brake Controller
3. Brake assembly
4. Regulator for feed unit connection
5. Engine power connection
6. End stroke pressure network
7. Adjustment for return connection unit
8. Output signal to the crushing of end stroke

### Technical specification

Model	TASG2
Code	8602352
No-load speed - rpm/min	1750
Drilling capacity mm - Wood	14
Drilling capacity mm - Aluminium	11
Drilling capacity mm - Steel	8
Total stroke - mm	100
Braked stroke - mm	50
Feed thrust at 6 bar - Kg	100
Power - Watt	450
Power - HP	0,6
Weight - Kg	5,7
Air consumption - NI/cycle	650
Air	1/4' GAS
Hose - ø min	10
Standard chuck - Code	3716312