
Screwdrivers with torque control - Clutch type: ACCU-TRK

Data sheet
AMI44AT

STRAIGHT SCREWDRIVERS - Push start - AMI Series
WATT: 70
Hexagonal coupling: 1/4”

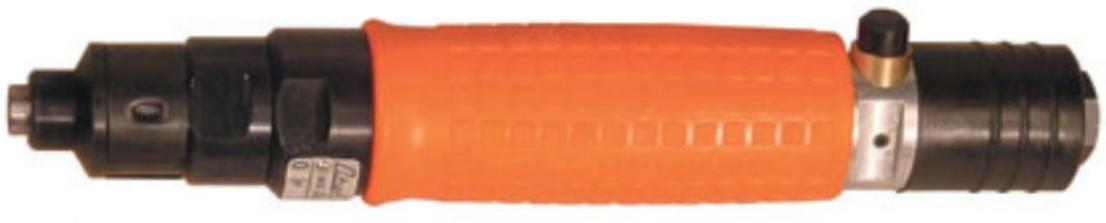

Description

This clutch type stops the power supply to the motor and stops tool rotation when a preset torque is reached. The clutch enables high- precision tightening torques (+/- 15% in flexible fastenings and +/- 10% in rigid fastenings), increases productivity and eliminates waiting times. The system prevents vibration of the operator’s hand. The clutch range is adjusted using one of the variety of springs available. Screwdrivers of the ACCU-TRK® family are supplied with a clutch spring enabling use of the maximum torque. If you require a lower adjustment range, request a spring with a lower rating.

Technical specification

Model	AMI44AT
Code	8301054
No-load speed - rpm/min	800
Screw tightening - Metal	M4 - M5
Torque - Nm	1,7-2,4
Spring colour	Neutral
Length - mm	215
Body - ø mm	33
Air connection	1/8” GAS
Weight - Kg	0,5
Hose - ø min mm	6
Air consumption - Nl/min	300

Screwdrivers with torque control - Clutch type: ACCU-TRK

Data sheet
AMI44AT

STRAIGHT SCREWDRIVERS - Push start - AMI Series

WATT: 70

Hexagonal coupling: 1/4”

Overall dimensions

