

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

SALGS ACCU-TRK SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 NI/1'

Note: the left rotation torque is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

Data sheet
SALGS7R ATE



1. 1/4" hexagonal bit holder
2. Grip zone
3. Compressed air inlet
4. Screwing completed signal

Technical specification

Reversible - Model	SALGS7R ATE
Reversible - Code	8604335
No-load speed - rpm/min	300
Torque Nm - Nm	4,8 - 14,6
Clutch spring	Gold

Form features

Standard coupling bit holder 1/4" (6.35 mm)

Torque Adjustment


MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
SALGS7R ATE


SALGS ACCU-TRK SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 NI/1'

Note: the left rotation torque is not controlled by the friction clutch. On ATE version: direct starting for Right and reversible motors.

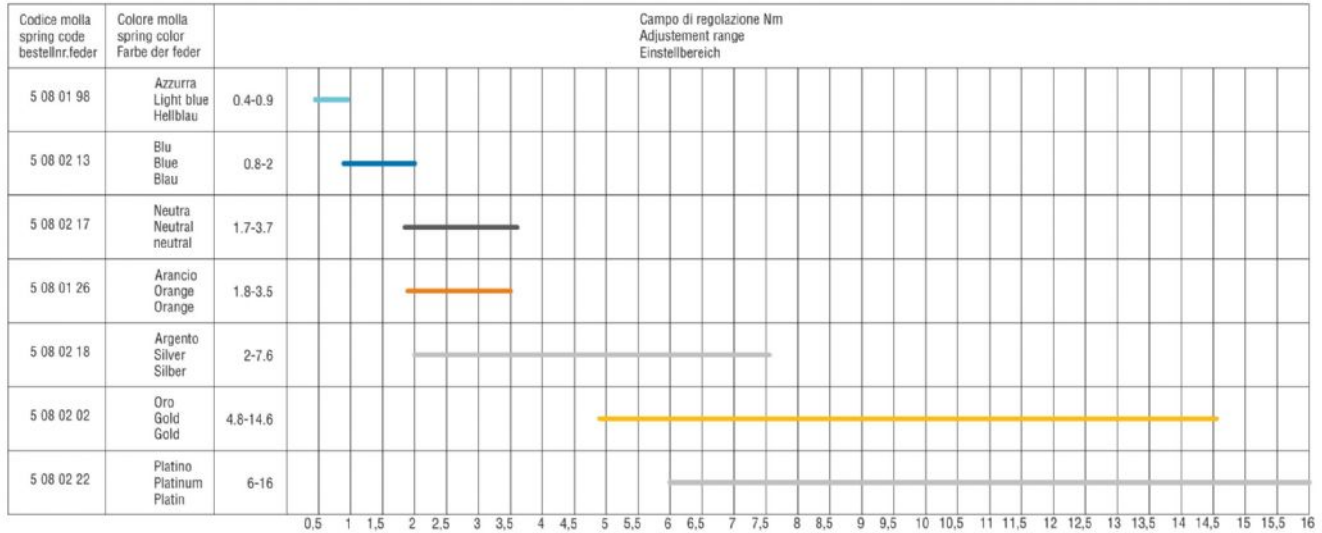

Overall dimensions

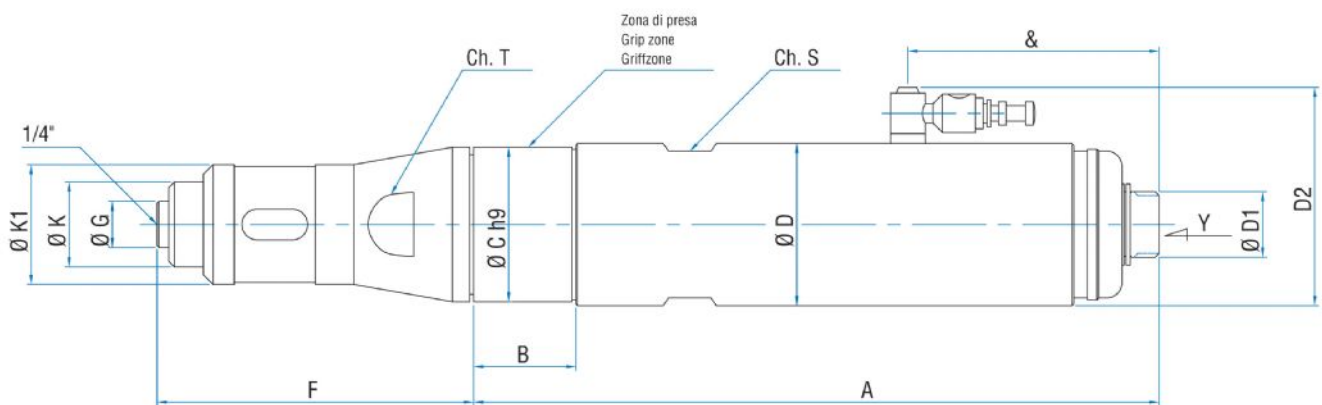

MOTORS FOR SCREW DRIVING APPLICATIONS WITH ACCU-TRK CLUTCH

Data sheet
SALGS7R ATE

SALGS ACCU-TRK SERIES - Reversible

WATT: 410 / CONSUMPTION: 720 NI/1'

Note: the left rotation torque is not controlled by the friction clutch. On

ATE version: direct starting for Right and reversible motors.

Model	Code	A	B	C	D	D1	D2	F	G	K	K1	S	T	Y	&
SALGS7R ATE	8604335	227,5	51,5	40	42	17	56,5	82	12	22	31	38	32	1/4"	65