


## AUTOMATIC SCREWDRIVING MODULAR SYSTEM "SAMOA"

SCREWDRIVERS WITH FIXED AUTOMATIC FEED - thrust and return  
with internal piston

With screw guide head with spring movement - knob with start button

Data sheet  
**VTM 2GC**

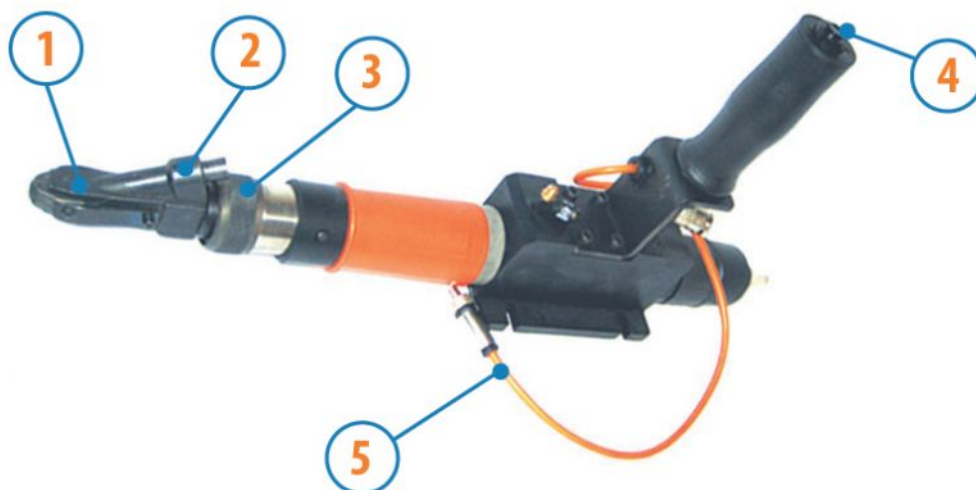

1. Head screw guide
2. Screws supply pipe
3. Head mounting ring Quick-release blade
4. Starter button
5. Return pipe

### Technical specification

|                            |         |
|----------------------------|---------|
| Model                      | VTM 2GC |
| Code                       | 8604017 |
| No-load speed - rpm/min    | 2300    |
| Max torque - Nm            | 3,5     |
| Power - Watt               | 300     |
| Air consumption - NI/cycle | 400     |
| Total stroke - mm          | 40      |
| Max thrust - KN            | 130     |
| Length - mm                | 400     |
| Width - mm                 | 80      |

## AUTOMATIC SCREWDRIVING MODULAR SYSTEM "SAMOA"

SCREWDRIVERS WITH FIXED AUTOMATIC FEED - thrust and return  
with internal piston

With screw guide head with spring movement - knob with start button

Data sheet  
**VTM 2GC**

Dimensions of the screws that can be fed with the normal standard equipment (mm)

### CIAPPETT

|         |           |         |         |         |         |
|---------|-----------|---------|---------|---------|---------|
| Ø testa | 3,5 - 4,2 | 4 - 5,2 | 5 - 6,5 | 6 - 7,2 | 7 - 8,2 |
| Length  | 8 - 25    | 10 - 25 | 12 - 25 | 14 - 25 | 16 - 25 |

### COMPAT

|         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|
| Ø testa | 4 - 5,2 | 5 - 6,5 | 6 - 7,2 | 7 - 8,2 | 8 - 9,2 |
| Length  | 10 - 25 | 12 - 25 | 14 - 25 | 16 - 25 | 18 - 25 |

### TUBO

|         |         |         |
|---------|---------|---------|
| Ø testa | 6 - 7,2 | 7 - 8,2 |
| Length  | 14 - 35 | 16 - 35 |

### MAXI

|         |         |         |         |         |          |           |             |           |
|---------|---------|---------|---------|---------|----------|-----------|-------------|-----------|
| Ø testa | 5 - 6,5 | 6 - 7,2 | 7 - 8,2 | 8 - 9,2 | 9 - 10,4 | 10 - 11,4 | 10,5 - 12,5 | 12 - 13,5 |
| Length  | 12 - 52 | 14 - 52 | 16 - 52 | 18 - 52 | 20 - 52  | 22 - 52   | 24 - 52     | 26 - 52   |